











Performance and Quality Mix, heat and freeze in the same cylinder. Hard-O-Tronic technology: automatic consistency control to determine when the product is complete. POM Beater resists extreme hot and cold temperatures and includes auto-adjusting scrapers for complete extraction. Post Cooling ensures frozen dessert is cold upon extraction. Includes two separate beaters for Ice Cream and Gelato production.

Convenience Water filling capability delivers the precise amount of water required for mixtures and cleaning functions, saving time and avoiding measuring errors. Intuitive control panel is accessible even while adding mix. Operations are done standing up for user comfort. Shelf mat is designed to hold both trays and tubs during extraction. Crystal setting can be used to create frozen pastries, mono portions and packaged servings with optional dispensing door.

Savings

Ready technology makes it possible to complete the entire Frozen Dessert production process in just one machine.

Safety TEOREMA guarantees facilitated assistance by providing online monitoring and diagnosis on a tablet, phone or PC wherever you are. Automatic defrost starts during power outages to avoid damage to the beater. Rounded corners reduce risk of injury to operator.

Hygiene Cleaning is easier thanks to the high temperature cleaning cycle and removable extraction chute. The cylinder and front panel is continuous stainless steel for maximum cleanliness and hygiene. Scoth-Brite treated steel is resistant to stains and fat residues. "Postponed cleaning" program guarantees hygienic safety even during prolonged production stand-by due to washing out remaining product residuals left at the end of the batch freezing cycle. Ask your Carpigiani dealer for the "Carpi Care Kit" to best maintain your Ready model.












*request the kits from your distributor to maintain your machine hygienically clean.

Ready 302 G TRU-2



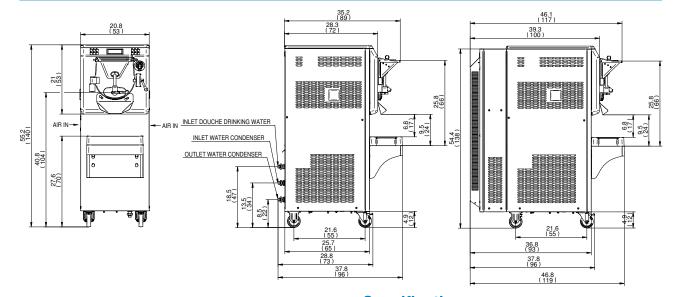

	WAT	ER	AIR		
Weights	lbs.	kgs.	lbs.	kgs.	
Net	705	320	772	350	
Crated	760	345	831	377	
	cu. ft.	cu. m.	cu. ft.	cu. m.	
Volume	44.5	1.26	50.85	1.44	
Dimensions	in.	cm.	in.	cm.	
Dimensions Width	in. 20.8	cm. 53	in. 20.8	cm. 53	
2					
Width	20.8	53	20.8	53	

55A

55A

Crated	760	345	831	377
	cu. ft.	cu. m.	cu. ft.	cu. m.
Volume	44.5	1.26	50.85	1.44
Dimensions	in.	cm.	in.	cm.
Width	20.8	53	20.8	53
Depth	37.8	96	46.8	119
Height	55.2	140	55.2	140

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

4.6 HP

Refrigeration System

R404A

Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

Air Cooled *

Minimum clearance: 6" (15 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

Cylinder Capacity

15 quarts (14 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68 °F (20 °C).

3P. 3W

3P, 3W

Bidding Specs									
Electrical	Volt	Hz	_ Ph	Neutral	☐ Yes	□ No	Cooling	☐ Air	■ Water
Options									



208-230/60/3 Water

208-230/60/3 Air

738 Gallimore Dairy Road, Suite 113 High Point, NC - 27265 Toll free (800) 648 4389

55A


55A











an Ali Group Company

