

## Hands-Free Floor Mount Stainless Steel Sink

Model	Flow-Rate
5011	Standard 2.0 GPM
5011-0.5	Low-Flow 0.5 GPM

### Product Specifications

Hands-Free operation is ideal for use in food service applications. Deep drawn from heavy duty 18-gauge type 304 stainless steel with large rounded corners. Exposed surfaces have an electropolished finish to enhance resistance to corrosion, reduce any bacterial growth and make for easier cleaning. Specially designed foot valve provides easy access to working parts without disconnecting mount or plumbing.

Outside Dimensions	19" x 18" x 41-1/2" High
Inside Bowl Size	17" x 14" x 7" Deep
Back Splash Height	9-1/2"
Water Activation	Single Foot Pedal Valve
Flow Rate	2 GPM or 0.5 GPM
Inlet Connections	3/8" Male Compression
Drain Opening	2"
Finish	Electropolished
Strainer	1-1/2" Dia. Duo Basket Strainer

### Includes

- (1) Sink bowl
- (1) Pedestal base
- (1) Set of 6 mounting nuts to attach bowl to pedestal base
- (1) Single foot pedal valve (bottom mount) with 2 nuts
- (1) Swivel gooseneck spout with aerator
- (1) Strainer assembly with basket
- (1) Connecting tubes for valve to spout connection
- (2) Fittings for valve to spout connection
- (1) Mixing check valve

### Product Compliance

NSF/ANSI 2 Food Equipment  
NSF/ANSI 372 Low-Lead



Part: \_\_\_\_\_ Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

Contact: \_\_\_\_\_

Date: \_\_\_\_\_


Approval: \_\_\_\_\_

Notes:




Hands-Free Floor Mount Stainless Steel Sink  
Models 5011 and 5011-0.5


Top

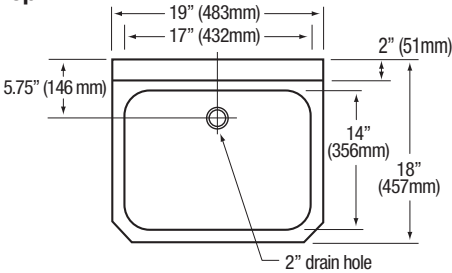


Front

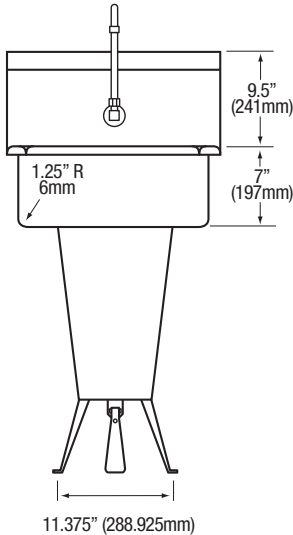


Hole Configuration

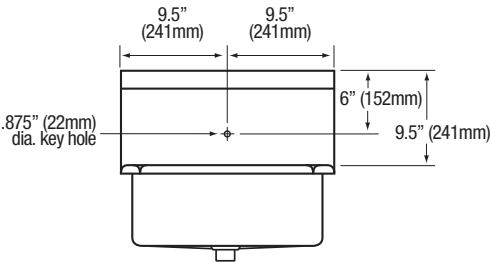



Side

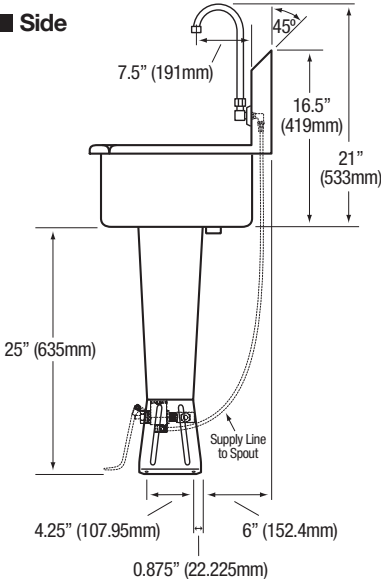

Floor Mounting Detail



Supply Line Detail



Plumbing Detail

