

Hands-Free Floor Mount
Stainless Steel Scrub Sink

| Model | Flow-Rate |
|-----------|------------------|
| 532F1 | Standard 2.0 GPM |
| 532F1-0.5 | Low-Flow 0.5 GPM |

Product Specifications

Seamless welded construction of 14-gauge type 304 stainless steel with a 1-1/2" rolled rim on front and sides. Exposed surfaces have a uniformed satin finish. Specially designed foot valve provides easy access to working parts without disconnecting mount or plumbing.

| | |
|----------------------|------------------------------|
| Outside Dimensions | 31" x 20" x 45-1/2" High |
| Inside Bowl Size | 28" x 16-1/2" x 10-1/2" Deep |
| Back Splash Height | 8" |
| Water Activation | Single Foot Pedal Valve |
| Spout Mounting Holes | 7/8" |
| Flow Rate | 2 GPM |
| Inlet Connections | 1/2" Male NPT |
| Drain Opening | 3-1/2" |
| Finish | Satin |
| Strainer | Basket Type |

Includes

- 1) Floor mount sink
- (1) Leg assembly set
- (4) Washers and nuts for connection sink to leg assembly set
- (1) Single foot pedal valves (bottom mount) with mounting nuts
- (1) Swivel gooseneck spout with aerator
- (1) Strainer assembly with basket
- (1) Connecting tube for valve to spout connection
- (2) Fittings, brass, 0.375" male compression and 0.375" male NPT
- (1) Mixing check valve

Product Compliance

NSF/ANSI 2 Food Equipment
NSF/ANSI 372 Low-Lead



Part: _____ Quantity: _____

Project: _____



Contact: _____

Date: _____


Approval: _____

Notes:


Hands-Free Floor Mount Stainless Steel Scrub Sink
Models 532F1 and 532F1-0.5

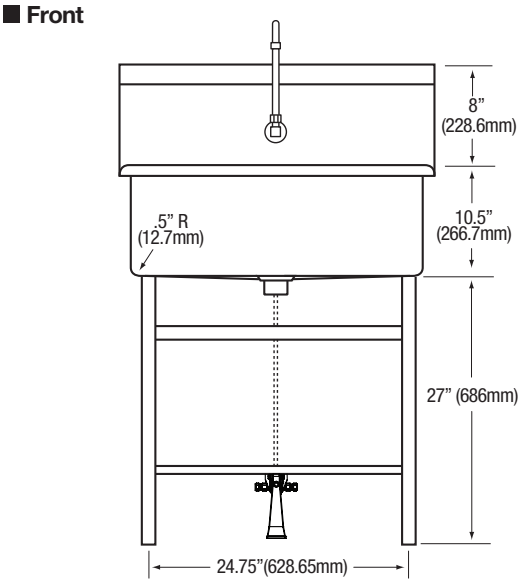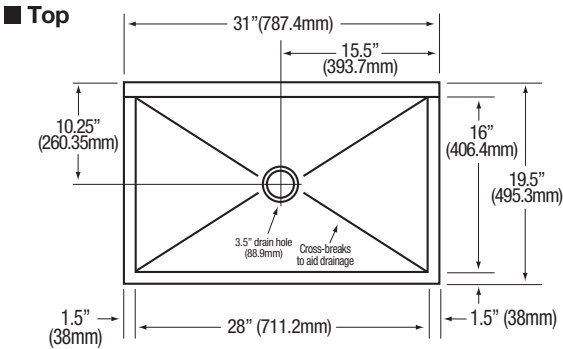


■ Hole Configurations

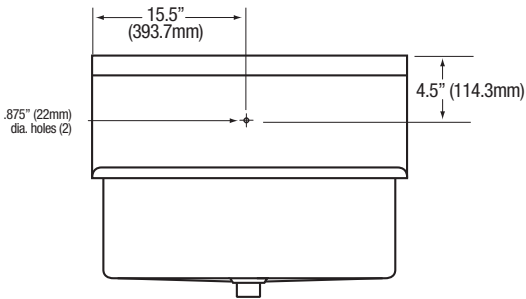


■ Side

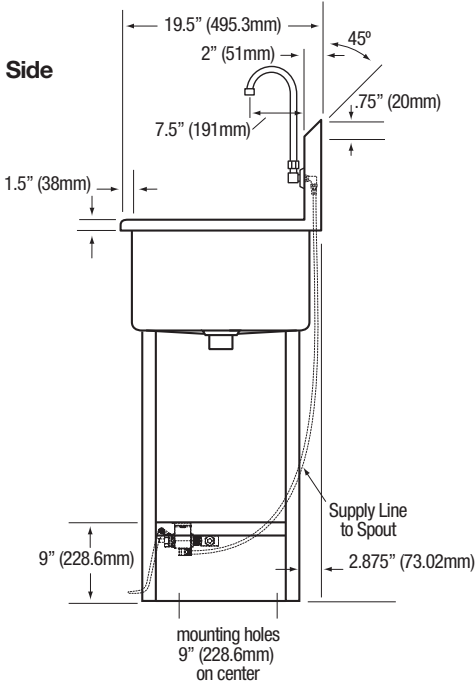

■ Floor Mounting Detail



■ Plumbing Detail



■ Supply Line Detail

