


Size (inch) Actual W x H	Size (inch) Nominal W x H x D	Koch Part Number	Initial Resistance (Inch W.G.)		Capacity (CFM) 500 FPM	Media Area (Sq. Ft.) (APPROX.)
			300 FPM	500 FPM		
23.5 x 23.5 x 15	24 x 24 x 15	104-501-001	.11	.19	2000	14.7
11.5 x 23.5 x 15	12 x 24 x 15	104-501-002	.11	.19	1000	12.2
15.5 x 19.5 x 15	16 x 20 x 15	104-501-003	.11	.19	1100	11.4
15.5 x 24.5 x 15	16 x 25 x 15	104-501-004	.11	.19	1400	14.0
19.5 x 19.5 x 15	20 x 20 x 15	104-501-005	.11	.19	1400	12.2
19.5 x 24.5 x 15	20 x 25 x 15	104-501-006	.11	.19	1750	14.3

Standard Construction

1. High Loft Polyester Media
2. Internal 9 gage wire frame
3. Sewn pocket construction
4. Wire Orientation based on number of pockets required
5. Optional 1" nominal size headers available

Specifications:

1. MERV 7 (ASHRAE Standard 52.2-2017)
2. Maximum operating temperatures 180 F (82 C)
3. Final Resistance: 1.0" W.G.
4. Classified per UL Standard 900

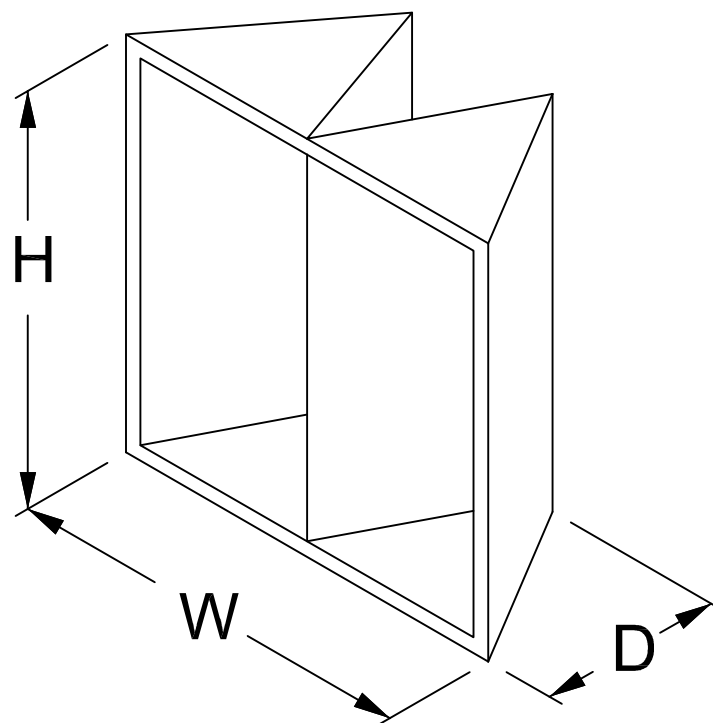

KOCH FILTER
PURE PERFORMANCE

**Duo-Pak
SprayStop-SHC
(Self-Seal)**

REV
LTR

REVISION

BY /
DATE

A

REDRAWN AND REVISED

D. MILLER
22MAY2023

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller
Date: August 27, 2020

Revision
A