



Project:


Item Number:

Quantity:

Five-Well Modular Hot Drop-ins with Marine Grade Wells

The Vollrath Company, L.L.C.

FIVE-WELL MODULAR HOT DROP-INS WITH MARINE GRADE WELLS

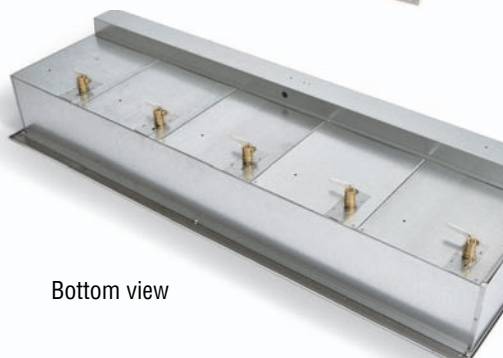

Bottom view

DESCRIPTION

Vollrath's Five-Well Modular Hot Drop-ins with Marine Grade Wells keep hot foods at proper serving temperatures. They are designed for top-mount installation and do not require hard-wiring.

SHORT DESCRIPTION

Five-well hot-drop-in, full-size wells are marine-grade stainless steel, removable bottom panel, standard or manifold drains, insulated on all non-exposed sides, cord with plug, stainless steel remote control panel, mounting clips.

Note: Orders for drop-ins cannot be canceled or returned.

Note: Drop-in meets NSF4 performance standards only when using moist heat. Operation with water is required for even heating of the food product.

Agency Listings



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

Item Numbers			Description	
Standard	Manifold	Manifold w/ Auto-Fill	Control	Voltage
1000 Watts Per Well				
3640801HD	3640851HD	3640861HD	Infinite	208-240
3640811HD	3640871HD	3640881HD	Thermostatic	
625 Watts Per Well				
36408HD	3640850HD	3640860HD	Infinite	208
3640810HD	3640870HD	3640880HD	Thermostatic	
36475HD	3647550HD	3647560HD	Infinite	240
3647510HD	3647570HD	3647580HD	Thermostatic	

FEATURES

- Drawn wells are marine grade stainless steel (SAE Type-316).
- Removable panel at the bottom of each well for service access
- Include gasket for under drip edge
- Standard drain is ½" (1.3 cm) with individual well ball valves
- Manifold drain is 1" (2.5 cm) copper tubing with master manifold shut off
- Insulated on all sides, including between each well
- Includes 6' (1.8 m) cord with plug. Does not require hard-wiring
- Stainless steel control panel with individual controls and power indicator light for each well
- Control panel has 4' (121.9 cm) tethered connection for flexible mounting locations
- Includes standard mounting clips for use on counters up to 3" (7.6 cm) thick for easy installation
- Accepts full-size and fractional pans up to 6" (15.2 cm) deep
- Adapter bars are recommended when using fractional pans

WARRANTY

All models shown come with Vollrath's two-year warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

ACCESSORIES

- ☐ Sheet pan adapter available. Item No. 19186.

CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Zero-clearance installation
- Indoor use only. Room temperature and HVAC can effect performance temperatures

Approvals	Date



www.vollrath.com



The Vollrath Company, L.L.C.

1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Main Tel: 800.624.2051 or 920.457.4851
Main Fax: 800.752.5620 or 920.459.6573
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
Induction Products: 800.825.6036
Countertop Warming Products: 800.354.1970
All Other Products: 800.628.0832



FIVE-WELL MODULAR HOT DROP-INS WITH MARINE GRADE WELLS

DIMENSIONS (Shown in inches (cm))

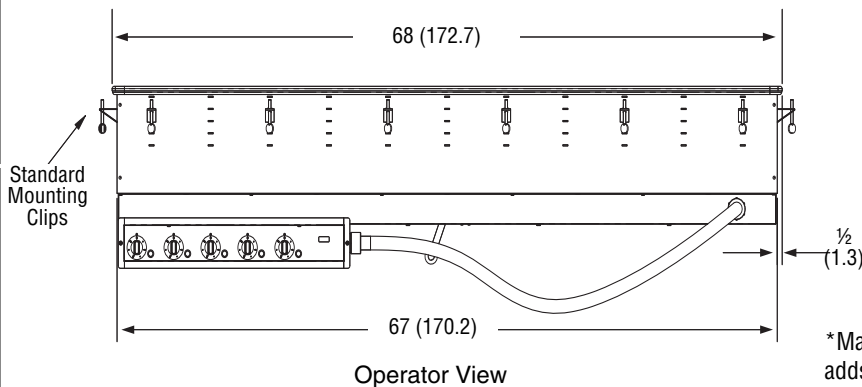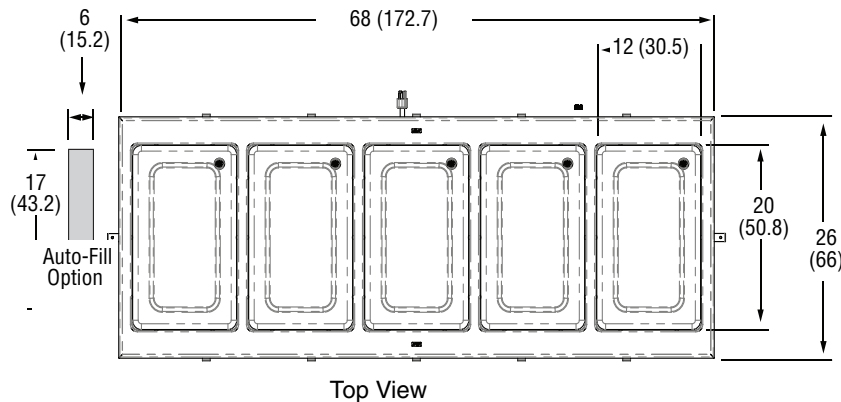

Controls must be mounted on operator (raceway) side for proper orientation with wells.

Control Panel Cutout

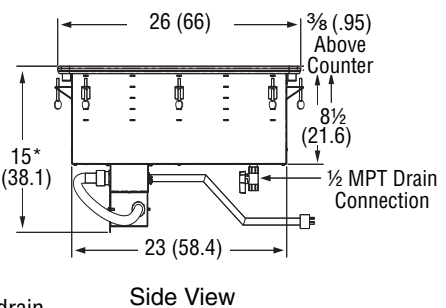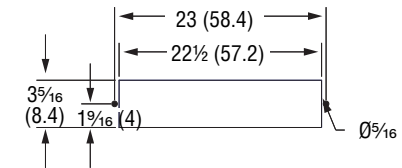


*Manifold drain adds 6 1/2 (16.5) to overall height

ELECTRICAL SPECIFICATIONS

Standard	Manifold	Manifold w/ Auto-Fill	Control	Cutout Dimension IN (CM)	Voltage	Amps	Plug
1000 Watts Per Well							
3640801HD	3640851HD	3640861HD	Infinite	67¼ x 25¼ (170.8 x 64.1)	208-240	18-20.8	NEMA 6-30P
3640811HD	3640871HD	3640881HD	Thermostatic				
625 Watts Per Well							
36408HD	3640850HD	3640860HD	Infinite	67¼ x 25¼ (170.8 x 64.1)	208	15	NEMA 6-20P
3640810HD	3640870HD	3640880HD	Thermostatic				
36475HD	3647550HD	3647560HD	Infinite		240	13	
3647510HD	3647570HD	3647580HD	Thermostatic				

Straight Blade Receptacles



Note: Cutout must have a 7/8" (2.2 cm) corner radius.

NOTICE: Do NOT modify the cord or plug on the drop-in. Modifying any component may damage the drop-in or cause injury, and will void the warranty.



www.vollrath.com

The Vollrath Company, L.L.C.

1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Main Tel: 800.624.2051 or 920.457.4851
Main Fax: 800.752.5620 or 920.459.6573
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
Induction Products: 800.825.6036
Countertop Warming Products: 800.354.1970
All Other Products: 800.628.0832