




COMMERCIAL QUALITY DRYER GTX52EASPWB-GTX52GASPWB

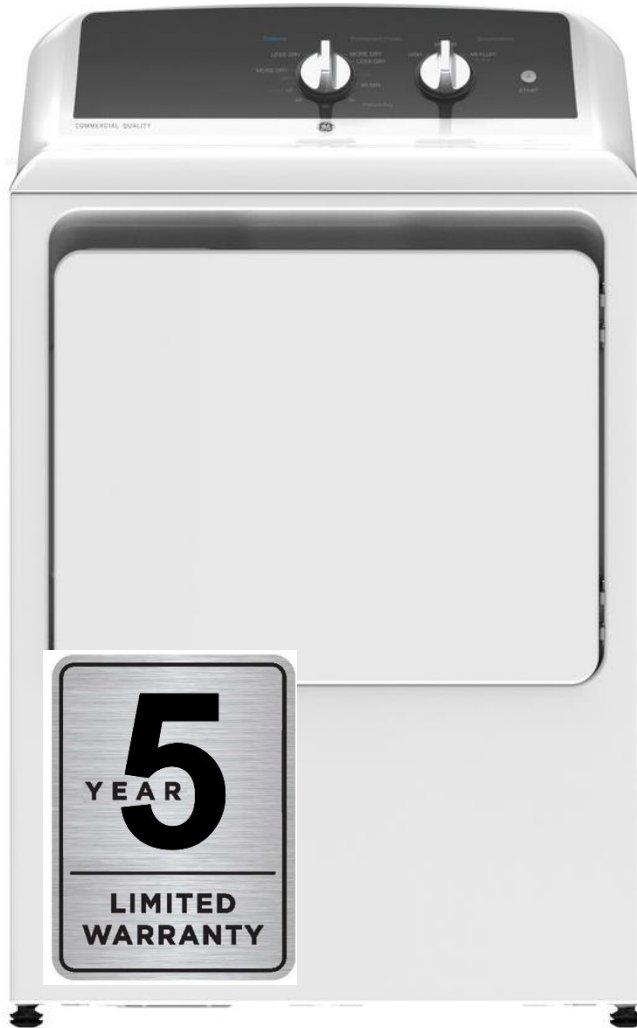

5 YEAR RESIDENTIAL USE WARRANTY

- Enjoy peace of mind with a commercial quality dryer featuring a 5-year parts and labor warranty for residential use

COMMERCIAL GRADE COMPONENTS

- This dryer is built to last, with upgraded hinges, knobs, door strength and close latches for long-lasting performance

LARGE 6.2 CU FT CAPACITY DRUM

- This large capacity dryer with aluminized drum can accommodate larger loads, including a King-sized comforter

LONG VENT

- Enjoy installation flexibility thanks to a long vent that allows for up to 120 ft. of venting

EVEN AIRFLOW

- This top load dryer is equipped with an extra-large heat diffuser that creates even heating and airflow for your laundry

SHALLOW DEPTH DESIGN

- Reaching into your dryer is easier than ever thanks to the shallow depth design, which also fits into more spaces without sacrificing capacity

RELIABLE MECHANICAL CONTROLS

- Mechanical controls provide simple, reliable performance for years
- Replacements parts Are inexpensive and readily available



SERVICE PRIORITY & PARTS PROMISE



- Receive timely response from our dedicated service team
- Most common repair components are available to be shipped in as soon as one business day


**GTX52EASPWB-GTX52GASPWB GE® Commercial Quality 6.2 cu. ft. Electric/ Gas Dryer**

NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with your dryer.

SPECIFICATIONS

Model	GTX52EASPWB GTX52GASPWB	
Control Type	Mechanical	
Wifi	None	
Cycles, Temps	3, 3- high, med, low	
Payment Options	None	
Exhaust Options/ max length (ft)	4-way rear, right, left, bottom 120	
GTX52EASPWB Electric	Element Watts	5600-240V, 4400-208V
GTX52GASPWB Gas	Burner BTU/ hr	22000 Natural gas
Motor	HP (kW)	1/3 (.24)
ELECTRICAL/ GAS REQUIREMENTS		
GTX52EASPWB	(V/Hz/Ph-Amp)	240-208/60/1-30
GTX52GASPWB	(V/Hz/Ph-Amp)	120/60/1-15
Gas Inlet Size	3/8" NPT	
Drum volume (Capacity)	cu. ft. (liters)	6.2 (175.6)
Drum Finish/ Material	Aluminized Alloy	
Net Weight	Lbs (kg)	100 (45.35) elect 103 (46.72) gas
Shipping Weight	Lbs (kg)	112 (50.8) elect 115 (52.16) gas
Shipping Dimensions	Height	45 (114.3)
In (cm)	Width	27.5 (69.85)
	Depth	27.5 (69.85)
Labor Warranty	Residential Use	5-year entire appliance
	Commercial Use	3-year entire appliance
Parts Warranty	All Use	5-year entire appliance
Dimensions are for planning purposes only. For complete information see the installation instructions packed with the product.		

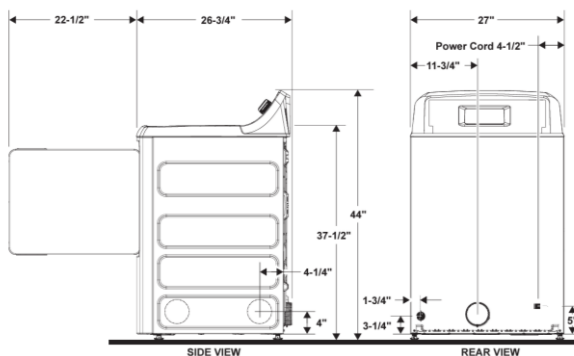44H x 27 W x 27 D**DRYER EXHAUSTING INFORMATION—
USE METAL DUCT ONLY VERTICAL AND
HORIZONTAL DUCTING**

		BEST PERFORMANCE	
		Maximum length of 4" diameter metal duct	
Domestic dryer models	Number of 90° turns	A 4" opening	B 2-1/2" opening
	0	120 ft.	90 ft.
	1	100 ft.	75 ft.
	2	85 ft.	65 ft.
	3	70 ft.	55 ft.
	4	60 ft.	45 ft.
	5	55 ft.	35 ft.

For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart. When calculating the sum vent system length, you must add all the straight portions and elbows of the system (including the transition duct).

**FOR COMPLETE INFORMATION, SEE INSTALLATION INSTRUCTIONS PACKED WITH YOUR DRYER.
DUCTING MATERIALS:**

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semirigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

EXHAUST LENGTH CALCULATION:

- Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
- The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow. Dryers **must** be exhausted to the outside.

CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard. Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

Listed by
Underwriters
Laboratories