



|              |     |          |  |       |
|--------------|-----|----------|--|-------|
| PROJECT NAME |     | LOCATION |  | AIA # |
| ITEM #       | QTY | MODEL #  |  | SIS # |

# SPEC SERIES®

REACH-IN SOLID SWING DOOR HEATED CABINETS

|        |              |              |              |
|--------|--------------|--------------|--------------|
| models | STR1HRI89-1S | STA1HRI89-1S | STG1HRI89-1S |
|--------|--------------|--------------|--------------|




| STR1HRI89-1S    |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Stainless steel side walls, back, floor, door liner, & ceiling. |

| STA1HRI89-1S    |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |

| STG1HRI89-1S    |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, with matching aluminum sides.             |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |

## plan view

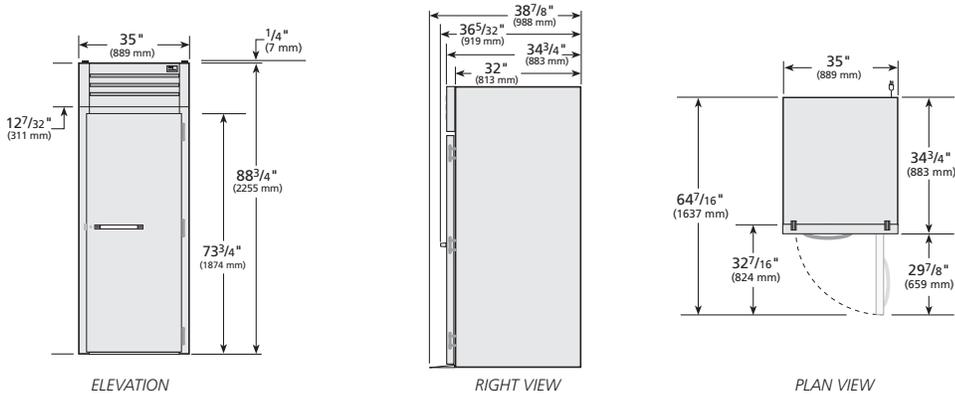

## SPECIFICATIONS

| Dimensions  | in.            | mm.           |
|-------------|----------------|---------------|
| Length      | 35             | 889           |
| Depth       | 34 3/4         | 883           |
| Height      | 88 3/4         | 2255          |
| Electrical  | U.S.           | International |
| Watts       | 2000           |               |
| Voltage     | 115/208-230/60 |               |
| NEMA        | 14-20P         |               |
| Cord Length | 9 ft.          | 2.74 M.       |

115/208-230/1  
NEMA-14-20R

† Depth does not include 4 1/8" (105 mm) for ramp.  
 \* Height does not include 1/4" (7 mm) for system mechanical components.  
 Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit.

Specifications subject to change without notice.  
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

MADE WITH INNOVATION IN THE USA

1/24 Printed in U.S.A.

APPROVALS

AVAILABLE AT



|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

REACH-IN SOLID SWING DOOR HEATED CABINETS

|        |              |              |              |
|--------|--------------|--------------|--------------|
| models | STR1HRI89-1S | STA1HRI89-1S | STG1HRI89-1S |
|--------|--------------|--------------|--------------|



## standard features

### HEATER SYSTEM

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- Two (2) stainless steel (for corrosion resistance), finned tube heating elements (1000 watts each) for uniform generation of electric heat. Cabinet comes with a total of 2000 watts.
- Equipped with low-velocity fans to assure even temperature distribution throughout the cabinet. Fans are controlled by exterior on/off switch.
- Manually controlled vent located on top of the cabinet for positive humidity control.

### CABINET CONSTRUCTION

- Stainless steel breaker caps.
- Insulation - entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- One (1) heavy gauge stainless steel ramp.

- Designed to accept roll-in racks (inboard castors) with maximum dimensions of 27" L x 29" D x 72" H (686 mm x 737 mm x 1829 mm)(supplied by others).

### DOOR

- Lifetime guaranteed bolt style door lock standard.
- Lifetime guaranteed heavy duty all metal working door handle.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, Three (3) per door section.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- Field reversible hinge.

### LIGHTING

- Incandescent interior lighting; lights activated by exterior on/off switch, safety shielded.

### MODEL FEATURES

- Exterior, color coded, temperature display; accurate direct reading of internal cabinet temperature.
- Designed to hold warm baked or cooked food. Cabinet is not designed to heat ambient or cold product.

- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- 12" x 20" (305 mm x 508 mm) pan for water included, if additional humidity is required.
- NSF/ANSI Standard 4 compliant for open food product.

### ELECTRICAL

- True requires that a sole use circuit be dedicated for the unit.
- Unit completely pre-wired at factory and ready for final connection to a 115/208-240/60 Hz. single phase, 20 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

*(upcharge & lead times may apply)*

- Stainless back. (STR, STA, STG)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



| Model         | Elevation | Right   | Plan    | 3D      | Back |
|---------------|-----------|---------|---------|---------|------|
| ST()1HRI89-1S | TFQY82E   | TFQY51S | TFQY51P | TFQY823 |      |