

Industra

by TCP

LED Round High Bay Luminaires

Product Specifications



TCP's easy-to-install LED Round High Bay Luminaires have a sleek, robust design that can be paired with optional reflectors to meet a variety of application needs.

Combining long life and outstanding efficacy up to 165 LPW, TCP offers a cost-effective solution to maximize energy and maintenance savings. These LED luminaires instantly deliver brilliant white light, eliminating long warm-up times experienced with HID fixtures.

Reasons to choose the LED Round High Bay Luminaires from TCP

- Energy efficient design delivers up to 165 LPW and uses up to 67% less energy than HID alternatives
- Smooth, uniform 0-10V dimming
- Instant on
- Long life: 50,000 hours
- Heavy duty die-cast aluminum housing
- IP65 wet location rated
- Standard hanging hook and optional pendant mount adapter available for easy installation
- Mercury-free and environmentally friendly

Ideal Applications

- Warehouses & Distribution Centers
- Commercial Facilities
- Aisles (Open & Stock)
- Retailers
- Schools & Municipalities
- Field Houses & Gymnasiums
- Open Ceiling Designs

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com



Not all versions of this product are qualified on the DLC QPL.
To view our DLC qualified products, please consult the DLC
Qualified Products List at www.designlights.org/qpl.

Specifications

Input Line Voltage 120-277VAC or 347/480VAC
 Input Line Frequency (Hz) 50/60HZ
 Wattage (W)..... 80W/100W/150W/200W
 Lumens (L)..... 13200L/16500L/24750L/33000L
 Lumens per Watt (LPW)..... >165 LPW
 Rated Life..... 50,000 hours
 Minimum Starting Temperature -40°C (-22°F)
 Maximum Operating Temperature..... 50°C (122°F)
 CRI >80
 Power Factor >0.95
 THD..... <20%
 Surge Protection 4kV
 Ratings cULus wet location rated, IP65
 Controls..... 0-10V dimming (standard)



LED Round High Bay



LED Round High Bay
with aluminum reflector



LED Round High Bay
with acrylic refractor

Replacement Strategy

TYPE	WATTAGE	ENERGY SAVINGS
TCP LED Round High Bay – 13,200 Lumens	80W	—
150W Metal Halide	150W	47%
TCP LED Round High Bay – 16,500 Lumens	100W	—
250W Metal Halide	295W	64%
TCP LED Round High Bay – 24,750 Lumens	150W	—
400W Metal Halide	458W	67%
TCP LED Round High Bay – 33,000 Lumens	200W	—
400W Metal Halide	458W	56%

Applications

The TCP LED Round High Bay is ideal for replacing traditional metal halide high bay systems. Benefits include high efficiency, excellent color rendering, long life, instant on, and improved uniformity.

Suggested mounting heights from 40' – 60' with primary applications including warehousing, commercial facilities, manufacturing facilities, open floor, aisle applications, and gymnasiums.

Construction

- Housing: durable and lightweight cast aluminum alloy
- Lens: tempered glass
- Finish: powder coated, post-painted black
- Easy-to-install with hanging hook (standard) or optional pendant mount adapter or pendant mount adapter with wiring box
- Sleek, stylish design
- 6FT power cord

Electrical

- cULus wet location rated, IP65
- 0-10V dimming driver (standard)
- System rated for long 50,000 hour life
- Efficiently delivers up to 165 LPW

Optics

- 120° beam angle (without reflectors)
- Optional refractor available to minimize glare
- Multiple reflector options to fit a variety of applications and aesthetic needs



Listings

cULus Listed – wet location rated
IP65 Rated
RoHS Compliant
DLC 5.0 Premium
NSF Rated*

*Special order only

Warranty

Five year limited warranty against defects in manufacturing.

Catalog Ordering Matrix

Example: RHBZDA350K

RHB		ZD				
FAMILY	VOLTAGE ¹	CONTROLS/ DIMMING	LUMEN PACKAGE (POWER) ^{2,3}	COLOR TEMPERATURE	SPECIAL RATING ⁴	PAINT COLOR ⁵
RHB – Round High Bay	U – 120V/277V H – 347/480	ZD – 0-10V Dimming	A1 – 13,200L (80W) A2 – 16,500L (100W) A3 – 24,750L (150W) A4 – 33,000L (200W)	40K – 4000K 50K – 5000K	Blank – No Additional Special Rating NSF – NSF International Certified	Blank – Black WH – White

Field Installed Accessories: Other reflector options available by special order. Contact manufacturer for more information.

Item Number	Description	Item Number	Description
RHBPM34	3/4" PENDANT MOUNT ADAPTER	HBRALUM90	90° ALUMINUM REFLECTOR
RHBPMJB34	3/4" PENDANT MOUNT ADAPTER WITH JUNCTION BOX	HBRACREFL	ACRYLIC REFRACTOR
RHBSSENSOR1	WET LOCATION RATED DAYLIGHT HARVESTING OCCUPANCY SENSOR 120V / 277V	HBRACLENS	ACRYLIC LENS FOR HBRACREFL
RHBSREM1	OPTIONAL INFRARED REMOTE CONTROLLER FOR PROGRAMMING RHBSSENSOR1	HBRHWG	WIREFGUARD OVER HIGH BAY FIXTURE LENS. NOT COMPATIBLE WITH HBRACREFL OR HBRALUM90
RHBBRKT	ADJUSTABLE BRACKET	BILDAIP65EM30	30W IP65 WET LOCATION RATED BACKUP BATTERY

¹ 347V/480V versions include a voltage step-down on top of the unit. Unit overall height is increased.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.


³ Actual wattage may differ by +/- 10%.

⁴ NSF items are special order only, extended lead times will apply. DLC is pending.

⁵ Black color is standard. Other colors are special order only, extended lead times will apply.

100 pieces minimum order quantity for special color orders


Dimensions and Mounting Data

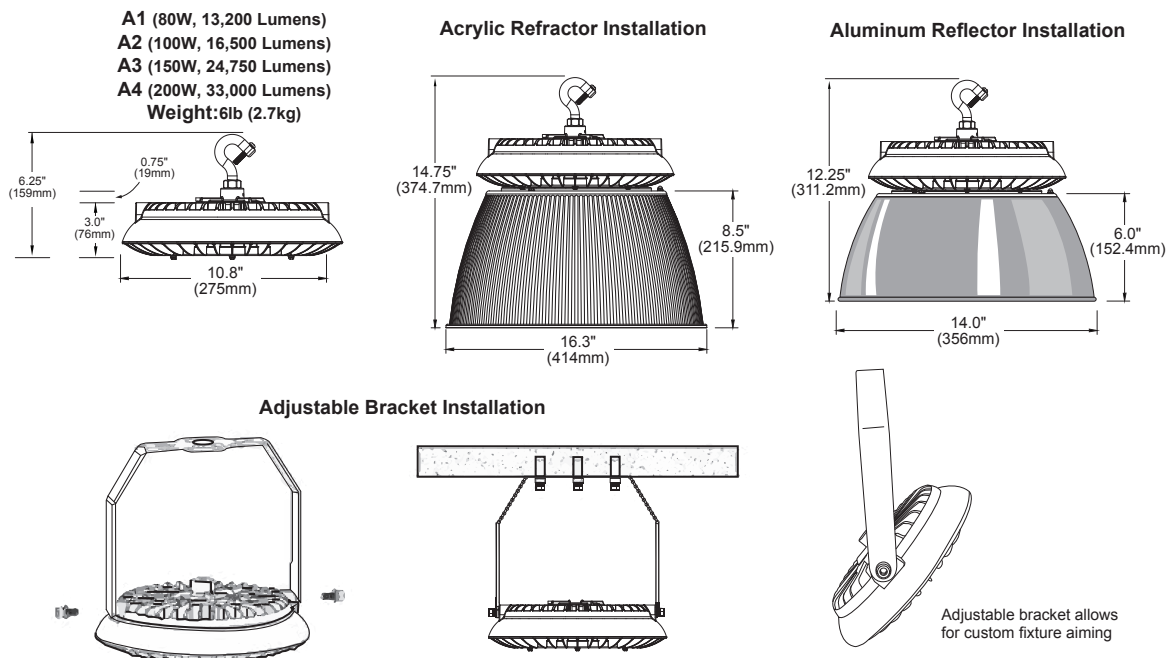

Photometric Report

Based on photometric data for
TCP Item #RHBZDA350K

Polar Graph

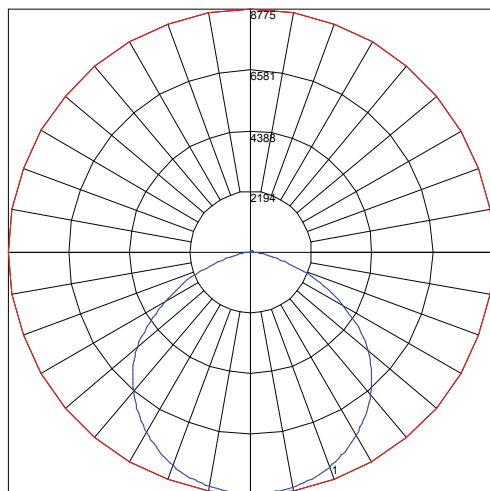

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99	99	99	99
1	110	105	101	98	107	103	99	96	99	96	93	95	92	90	91	89	87	85	85	85	85
2	100	92	86	81	97	90	85	80	87	82	78	83	79	76	80	77	74	72	72	72	72
3	91	81	74	67	89	80	72	67	77	71	65	74	69	64	71	67	63	61	61	61	61
4	84	72	64	57	81	71	63	57	68	61	56	66	60	55	64	59	54	52	52	52	52
5	77	64	56	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45	45	45	45
6	71	58	49	43	69	57	49	43	55	48	42	54	47	42	52	46	42	39	39	39	39
7	66	53	44	38	64	52	44	38	50	43	37	49	42	37	47	41	37	35	35	35	35
8	61	48	40	34	60	47	39	34	46	39	33	45	38	33	43	37	33	31	31	31	31
9	57	44	36	30	56	43	36	30	42	35	30	41	35	30	40	34	30	28	28	28	28
10	54	41	33	28	52	40	33	27	39	32	27	38	32	27	37	31	27	25	25	25	25

Zonal Lumen Summary

Zone	Lumens	%Luminaire	Zone	Lumens	%Luminaire
0-20	3222.48	13.30	70-80	1097.17	4.50
0-30	6889.16	28.40	80-90	100.70	0.40
0-40	11369.14	46.90	90-110	16.60	0.10
0-60	20166.34	83.10	90-120	32.71	0.10
0-80	24025.00	99.00	90-130	53.37	0.20
0-90	24125.70	99.40	90-150	98.87	0.40
10-90	23296.61	96.00	90-180	134.41	0.60
20-40	8146.66	33.60	110-180	117.81	0.50
20-50	12849.64	53.00	0-180	24260.11	100.00
40-70	11558.69	47.60			
60-80	3858.66	15.90			

Total Luminaire Efficiency = N.A. %

Spacing Criterion (0-180): 1.28

Spacing Criterion (90-270): 1.30

Specifications and dimensions subject to change without notice.
For the most up-to-date specs and warranty information, please visit www.tcp.com

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP FEB 2022/WF244950



Not all versions of this product are qualified on the DLC QPL.
To view our DLC qualified products, please consult the DLC
Qualified Products List at www.designlights.org/qpl.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516