

DESIGNER LINE ROLL-IN WARMER

Model: DL2WI

2-Section Roll-In Warmer with 66¼" Cart Capacity

Standard - Stainless steel front, aluminum end panels and interior
Suffix SA- Stainless steel exterior, aluminum interior
Suffix SS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Custom laminates	Locking hasp (lock not included)
Half doors	Stainless steel mesh cover
Roll-Thru	Coverless hinges
Hinged glass doors	

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self-contained, performance-rated "plug" warming system
90°F - 180°F temperature range
Humidity relief vent with master on/off control switch
Unique air flow distribution ducts
Heating system is accessible on top of cabinet, separate from the food zone

CABINET ARCHITECTURE

Removable stainless steel rack guides
Removable stainless steel ramps
Reinforced stainless steel floor
3" non-CFC polyurethane foam insulation
Chrome-plated flow line handles
Cam action, lift off hinges
Magnetic snap-in door gaskets
Cylinder lock in door
Self-closing doors
66 1/2" high door openings (66 1/4"H rack capacity*)

Standard Finish

Stainless steel front, aluminum end panels and interior

-SA Finish

Stainless steel exterior, aluminum interior

-SS Finish

Stainless steel exterior and interior

MODEL FEATURES

Automatic interior lighting
External thermostat control
External digital thermometer

* Racks not supplied

IMPORTANT NOTE: Cabinet upper side panels and heating "plug" system can be easily removed and reinstalled at installation site where space limitations are confining.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	64 (1812 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (incl. handles) (in.)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Door(s)	2
Rack Capacity**	2 ea.

ELECTRICAL DATA


Voltage (int'l)	115/208-230/60/1 (220/50/1)
Total Wattage @ 208-230 Volts	3000
Feed Wires (incl. ground)	4
Total Amps (int'l)	14.5 (13.8)
10 ft. Cord/Plug [attached] (int'l)	No (No)

SHIPPING DATA


Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	168 (4757 cu l)
Weight Std - Crated (lbs.)	680 (308 kg)
Weight SS - Crated (lbs.)	720 (327 kg)
Weight Std - Uncrated (lbs.)	540 (245 kg)
Weight SS - Uncrated (lbs.)	575 (261 kg)

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
Figures in parentheses reflect metric equivalents rounded to the nearest whole millimeter.

Model Plan Views

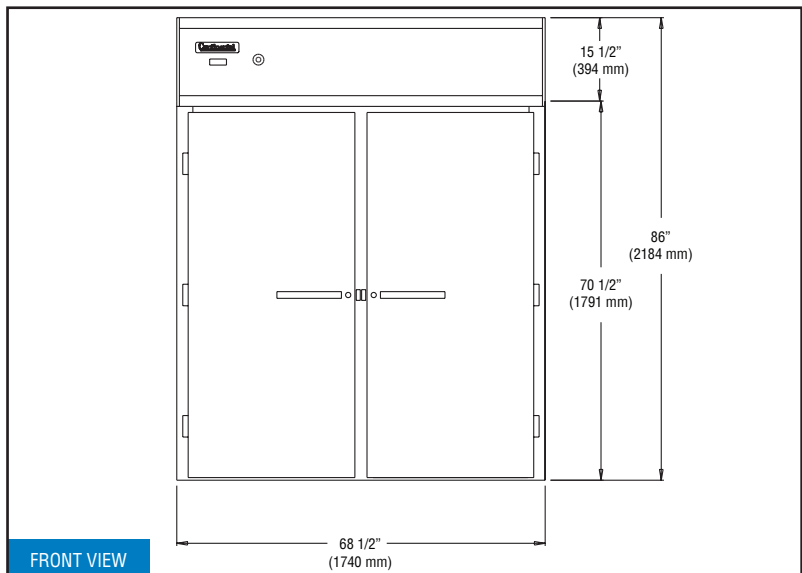

FRONT VIEW

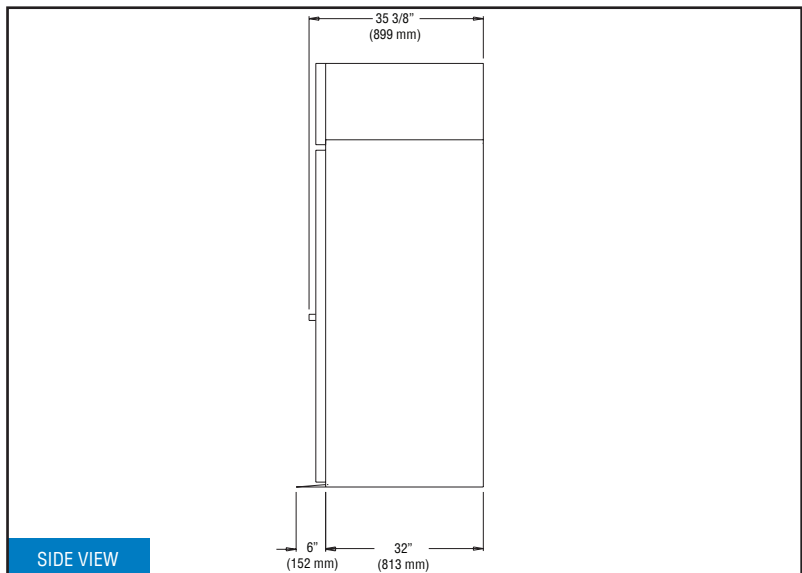

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12\"

HEATING SYSTEM (Range 90°F - 180°F)

Electrically operated heating system is controlled by means of a highly sensitive calibrated thermostat mounted on the cabinet front. Fin strip heating elements are located at the base of the interior. Air circulating blower located in a top mounted, concealed "plug" housing distributes heat throughout product zone, assuring uniform cabinet temperatures. Cabinet top has a built-in humidity relief vent. The entire "plug" system is mounted on a sturdy steel, rail-type base which can be easily removed if refrigerator or freezer conversion is desired. A strict quality assurance team inspects all material and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

INSULATION

All cabinet walls, top and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

CABINET CONSTRUCTION

All materials are of top quality, assembled to conform with strict quality-assurance requirements.

The cabinet front is constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor-tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminated overlapping panels with raw edges. Cabinet body is insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Automatic interior lighting is controlled by door openings. Cabinets are equipped with an easily removable, stainless steel ramp and interior rack guides.

DOOR CONSTRUCTION

Solid hinged door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam action, lift-off type featuring positive safety stop at 120 degrees.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2013. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.