



TWIST-N-SET® REPLACEMENT CLOSET FLANGE TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	Contractor _____
Engineer _____	Tag _____
PO # _____	Representative _____

SPECIFICATIONS

Oatey Twist-N-Set Cast Iron Replacement Closet Flanges are designed to replace broken cast iron closet flanges. Gasket expands to fit inside of service weight, heavy weight and no hub pipe. Installs easily without tools.

PHYSICAL PROPERTIES

ABS Plastic	Black
PVC Plastic	White

DIRECTIONS


Remove old cast iron flange. Thread rubber gasket onto flange until the gasket expands to meet the inside walls of the pipe. Tilt and twist flange until the gasket begins to grip the pipe. Level and push the flange flush with the floor while using the closet bolts to complete the tightening process. Align the flange and screw it onto the floor.



PRODUCT SELECTOR

TWIST-N-SET® REPLACEMENT CLOSET FLANGE			
✓	Product Number	Description	Pack
	43654	3" PVC Twist N Set Closet Flange	2
	43655	3" ABS Twist N Set Closet Flange	2
	43651	4" PVC Twist N Set Closet Flange	2
	43650	4" ABS Twist N Set Closet Flange	2
	43653	4" Cast Iron Twist N Set Closet Flange	2

TWIST-N-SET® REPLACEMENT CLOSET FLANGE DIMENSIONS

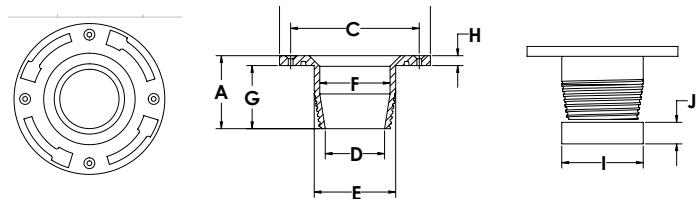

DIMENSIONS

3" TWIST-N-SET DIMENSIONS				
[A]: Overall Height	3.88"	[F]: Hub ID	2.59"	
[B]: Overall Diameter	7.00"	[G]: Height	3.43"	
[C]: Screw Center	6.00"	[H]: Flange Ring Thickness	0.45"	
[D]: Hub Entrance ID	2.54"	[I]: Gasket OD (Bottom/Top)	2.86"	3.03"
[E]: Hub O.D.	2.89"	[J]: Gasket Height	1.00"	

4" TWIST-N-SET DIMENSIONS

4" TWIST-N-SET DIMENSIONS				
[A]: Overall Height	3.36"	[F]: Hub ID	3.24"	
[B]: Overall Diameter	6.95"	[G]: Height	2.90"	
[C]: Screw Center	6.0"	[H]: Flange Ring Thickness	0.46"	
[D]: Hub Entrance ID	2.73"	[I]: Gasket OD	3.75"	
[E]: Hub OD	3.75"	[J]: Gasket Height	1.00"	

Access BIM/Revit content through www.oatey.com