

#### **FEDERAL INDUSTRIES**

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206	
Fax: 608-424-3234	
Email: geninfo@federalind.com	
Website: www.federalind.com	

Project Name:		AIA#
ltem #:		
Model #:	Qty:	SIS#
Approval:		

## **UNDER COUNTER SL - Square End, Refrigerated, Self-Serve Display Case**

Incorporate into your own counter to drive product sales. The under-counter merchandiser will entice customers with last minute impulse sales through visual appeal.



Shown with optional accessories

### **OPTIONAL ACCESSORIES**

- ☐ White or stainless interior (Including step riser or shelf)
- ☐ Glass, stainless steel, white or black solid shelf w/ LED light
- ☐ Special exterior finish
- ☐ Energy saving night curtain
- ☐ Security night cover
- ☐ Condensate pump
- ☐ 6" Legs
- ☐ 4" Casters
- ☐ Rear air intake, front discharge

MODEL	DIMENSIONS					
	( Includes End Panels )					
□ UCRSL3633S	35.7 x 24 x 32.5 (in)					
	907 x 610 x 826 (mm)					
□ UCRSL4833S	47.7 x 24 x 32.5 (in)					
	1212 x 610 x 826 (mm)					
□ UCRSL6033S	59.7 x 24 x 32.5 (in)					
	1516 x 610 x 826 (mm)					
□ UCRSL7233S	71.7 x 24 x 32.5 (in)					
	1821 x 610 x 826(mm)					

### **STANDARD FEATURES**

#### **Model Features**

- Black interior
- Squared ends with mirrored liner
- Black top
- Black 1 step riser
- Black powder coated steel base
- Black exterior. Other finishes optional
- Light and power switch on back of case
- Front access to refrigeration system for quick and easy service
- Cord & plug
- Recessed casters with adjustable leg lever

#### Refrigeration

- On-Demand PTC condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40°F
- Easy clean, rustproof insulated evaporator coil compartment
- Rear condensing unit air intake & discharge
- R513a refrigerant
- Thermometer

#### Lighting

• 3500 LED top light

#### **Agency Approvals**

- UL, C-UL and UL Sanitation listed to NSF-7, Type II conditions
- DOE 2017 compliant











AIA#


# **UNDER COUNTER SL - Square End, Refrigerated, Self-Serve Display Case**

SIS#

### **Product Specifications**

Intended Environment: Type II - Designed to operate in maximum ambient conditions of 80°F (24°C) and 55% relative humidity.								
Zone	Intended Product To Be Displayed  Avg Prod Temp °F/°C							
All	Packaged Refrigerated Products	38°F / (3.3°C)						

DIMENSION: xx"/(mm)
DIMENSION TOLERANCE +/- 0.25 (6.4)

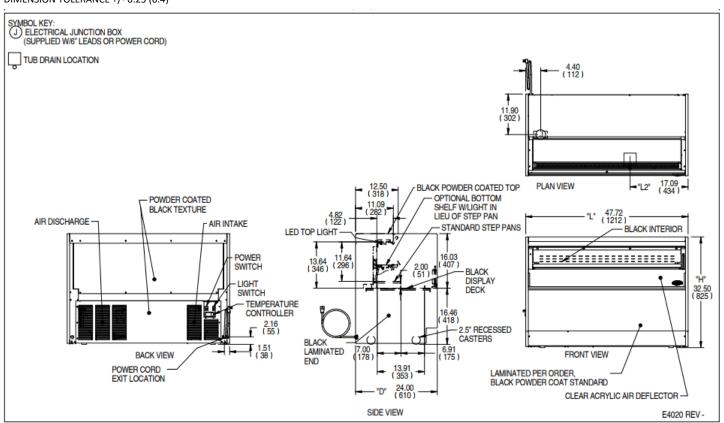

	DIMENSION		TUB DRAIN	STE	P RIS	ER INTERIO		PERMANENT CONNECT			NEMA CORD &					
MODEL	L	D	Η	L2	# OF	D	L	VOLUME	2-WIRE	+ GRO	UND	PLUG	REFRIGERANT	C.U.	CONDENSATE	
MODEL	in	in	in	in	STEPS	in	in	CUFT	ELECTRICAL	AMPS	MAX	2-WIRE+	KEFKIGEKANI	HP	REMOVAL	
	mm	mm	mm	mm	SIEPS	mm	mm	COFI	ELECTRICAL	AIVIPS	FUSE SIZE	GROUND				
UCRSL3633S	35.7	24.0	32.5	4.34	1	8.00	33.6	- 2.72	2 72	120/60/1	12.3	20	5-20	R513a	1/2	CONDENSATE
OCK3E30333	907	610	826	110	1	203	853		120/60/1	12.5	20	3-20	K2129	1/2	PAN	
UCRSL4833S	47.7	24.0	32.5	17.01	1	8.00	45.6	3.67	120/60/1	12.5 20	20	5-20	R513a	1/2	CONDENSATE	
UCK3L48333	1212	610	826	432	1	203	1158				20			1/2	PAN	
UCRSL6033S	59.7	24.0	32.5	26.01	1	8.00	57.6	4.62	120/60/1	13.0	13.0 20	5-20	R513a	3/4	CONDENSATE	
OCKSEOOSSS	1516	610	826	661	1	203	1463		4.02	120/00/1	13.0	20	3-20	113138	3/4	PAN
UCRSL7233S	71.7	24.0	32.5	32.01	1	8.00	69.6	5.58	5 50	120/60/1	13.5	20 5-20	R513a	3/4	CONDENSATE	
OCKSE72333	1821	610	826	813	-	203	1768		120,00/1	13.3	,.5	3 20			PAN	

- Case temperature will vary if the air curtain is disrupted.
- Due to continuing engineering improvements, specifications are subject to change without notice.

**DOE 2017**Energy Efficiency
Compliant







**Phone:** 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com
Website: Federalind.com