



RESTIGE Signature Series Uni-Serv Speed Bar

NSF.

| ltem #: | Qty #: |
|------------|--------|
| Model #: | |
| Project #: | |

25" and 30" Wide Units



15A - 120V GFI Duplex Receptacle Hidden Beneath Blender Shelf



Conforms To NSF 61/9 Lead Free Requirements

FEATURES:

48" Units - 9" x 9" x 4" dump sink.
24" x 11" insulated ice bin; 70 lbs. ice capacity.
24" speed rail.

60" Units - 10" x 14" x 7" dump sink.
30" x 11" insulated ice bin; 89 lbs. ice capacity.
30" speed rail.

ALL UNITS INCLUDE:

1 3/4" return with soda gun knock-out.

Recessed drainboard with removable perforated top for glassware. Recessed blender station with 15A - 120V GFI duplex outlet hidden beneath shelf.

Includes two removable plastic bottle racks.

6" swing spout faucet.

Stainless steel top, apron, sides and legs with

1" adjustable stainless steel bullet feet.

Adjustable stainless steel side cross-bracing.

7" backsplash.

MECHANICAL:

PRU-19 Series - K-125 4" O.C. 6" Splash Mount Faucet. PRU-24 Series - K-51 4" O.C. 6" Deck Mount Faucet.

Faucet meet federal lead free standards.

1" IPS drain (non-cold plate ice bin and glassware shelf). 1/2" IPS drain (cold plate ice bin).

3 1/2" basket drain (sink bowl).

MATERIAL:

20 gauge, 300 stainless steel

Recessed Glassware Shelf: 18 gauge, 300 stainless steel **Legs:** 1 5/8" O.D. 18 gauge, stainless steel with adjustable plastic bullet feet

Ice Bin Insulation: 2 lbs. density foam-in-place

Cold Plate: Cast aluminum with 10 circuits (8 syrup and 2 water lines) with 5/16" diameter stainless steel bump and swedge ends.

OPTIONAL:

K-316-LU - Add wrist handles

SU-73 - Add mirror finish (factory installed only)

| 25" WIDE Model # | O.A. Size W x L x H | A | B | Approx. Weight | | 30" WIDE Model # | O.A. Size W x L x H | A | В | Approx. Weight | | Ice Bin Capacity |
|---------------------|------------------------|-----|-----|-------------------|----|---------------------|------------------------|-----|-----|-------------------|----|---------------------|
| PRU-19-48L or R | 25" x 48" x 36" | 24" | 12" | 105 lbs. | 27 | PRU-24-48L or R | 30" x 48" x 36" | 24" | 12" | 110 lbs. | 35 | 89 lbs. |
| PRU-19-60L or R | 25" x 60" x 36" | 30" | 18" | 130 lbs. | 28 | PRU-24-60L or R | 30" x 60" x 36" | 30" | 18" | 135 lbs. | 35 | 89 lbs. |
| | | | | | | | | | | | | |

With 10-Circuit Cold Plate

| PRU-19-48L-10 or R-10 | 25" x 48" x 36" | 24" | 12" | 140 lbs. | 37 | PRU-24-48L-10 or R-10 | 30" x 48" x 36" | 24" | 12" | 145 lbs. | 46 | 89 lbs. |
|-----------------------|-----------------|-----|-----|----------|----|-----------------------|-----------------|-----|-----|----------|----|---------|
| PRU-19-60L-10 or R-10 | 25" x 60" x 36" | 30" | 18" | 165 lbs. | 37 | PRU-24-60L-10 or R-10 | 30" x 60" x 36" | 30" | 18" | 170 lbs. | 46 | 89 lbs. |
| | | | | | | | | | | | | |

L and R Indicate Ice Bin Location.

\Lambda WARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

For Smart Fabrication™ Quotes:


Email: customer@advancetabco.com or Fax: 631-242-6900

Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL Overall: ± .500" Interior: ± .250"

ALL DIMENSIONS ARE TYPICAL

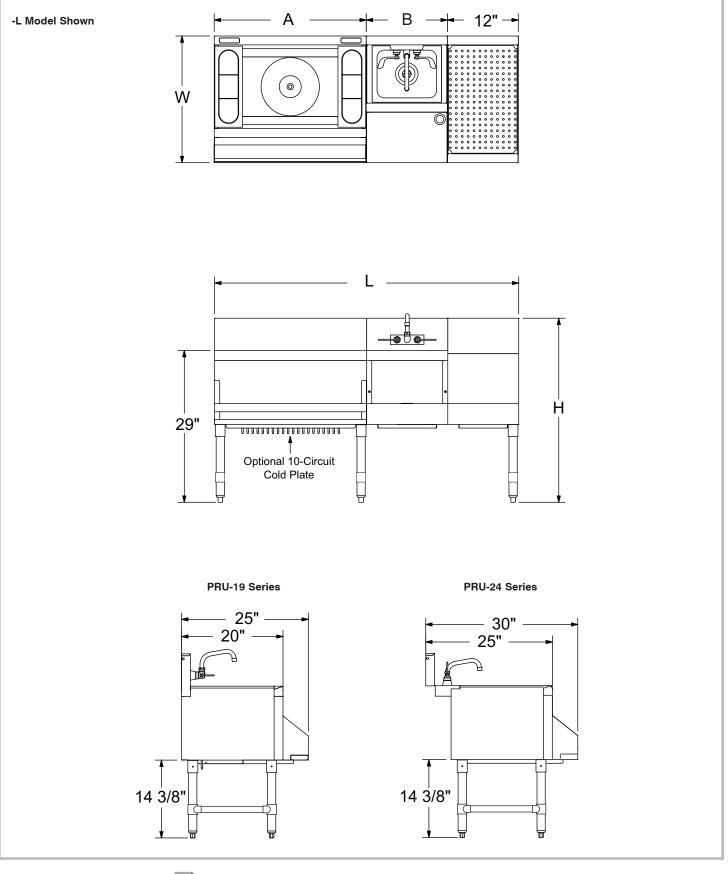

ADVANCE TABCO.

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, FEBRUARY 2024