




- Ideal for storing and transporting a variety of products and supplies.
- Welded steel wire grid panels (2x2") provide visibility and ventilation while maintaining security.
- 3-sided or 4-sided options to fit your needs.
- Dual sided, full length slanted handles extend 4" for ergonomic handling.
- Easy fold down side panel simplifies access while still securing items (on 4-sided option).
- Premium powder coat paint finish.
- Ships fully assembled, ready to use.
- Made in the U.S.A.

Low Profile Cage Carts

Model #			Side Configuration	Base Size L x W	Casters	Steel Gauge	Capacity (lbs.)	Dimensions L x W x H	Weight (lbs.)
Gray	Blue	Red							
F80125VCGY	F80125VCBL	F80125VCRD	3-Sided	48 x 24"	(4) 8" Rubber: 2 Rigid, 2 Locking Swivel	12	1,600	52 x 24 x 37"	91
F80118VCGY	F80118VCBL	F80118VCRD		60 x 30"				64 x 30 x 37"	101
F80126VCGY	F80126VCBL	F80126VCRD	4-Sided	48 x 24"				52 x 24 x 37"	118
F80119VCGY	F80119VCBL	F80119VCRD		60 x 30"				64 x 30 x 37"	131

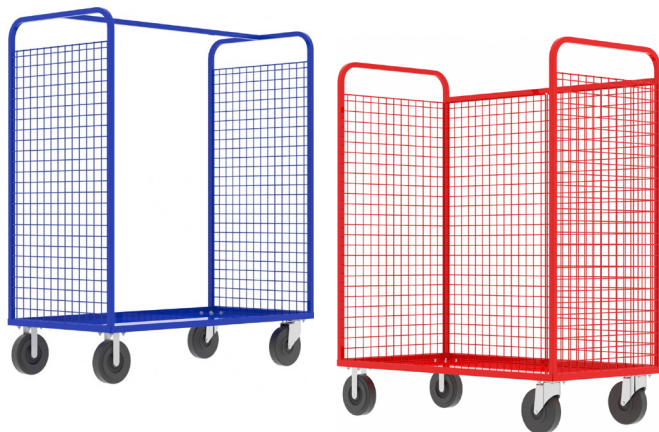

- Ideal for stock picking, storing and transporting large items.
- Welded steel wire grid panels (2x2") provide visibility and ventilation while maintaining security.
- 2-sided or 3-sided options to fit your needs.
- Vertical full length built-in side bar handles for simple ergonomic handling.
- Available with or without shelf, adjustable on 2" increments. (Additional shelves sold separately).
- 2-sided option utilizes full length hanging rod for added functionality and stability.
- Premium powder coat paint finish.
- Ships fully assembled, ready to use.
- Made in the U.S.A.

High Profile Cage Carts

Model #			Side Configuration	Shelf Option	Casters	Steel Gauge	Capacity (lbs.)	Dimensions L x W x H	Weight (lbs.)
Gray	Blue	Red							
F89254VCGY	F89254VCBL	F89254VCRD	2-Sided	-	(4) 8" Rubber: 2 Rigid, 2 Locking Swivel	12	1,600	57 x 30 x 68"	135
F89729VCGY	F89729VCBL	F89729VCRD		Shelf incl.					155
F89256VCGY	F89256VCBL	F89256VCRD	3-Sided	-					160
F89726VCGY	F89726VCBL	F89726VCRD		Shelf incl.					180

Additional Adjustable Shelf Accessory: F89720 - 250 lb. capacity