



Waterloo Pet Grooming 2.6 GPM Angled Spray Valve with 9' Coiled Polyurethane Hose

#750PRSVUHOSE



Item #: 750PRSVUHOSE Qty: _____
 Project: _____
 Approval: _____ Date: _____



Features

- Boasts a 2.6 GPM flow rate
- Includes a 9' coiled polyurethane hose
- Features a 3/8" NPSM female connection
- Hose allows easy maneuvering


Certifications

 CSA, US and Canada  NSF Listed

Technical Data

Hose Length	108 Inches
Color	Blue
Features	ASME A112.18.1-2018 / CSA B125.1-18 Massachusetts Accepted Plumbing Product NSF Listed NSF/ANSI 61 With Hose
Inlet	3/8"-18 NPSM Female Inlet
Spray Valve Flow Rate	2.6 GPM
Type	Spray Valves

Plan View

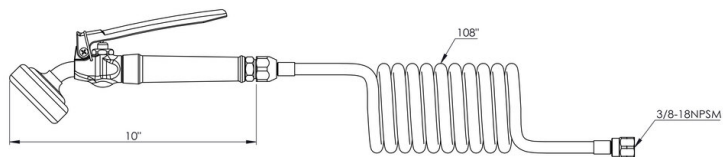

Notes & Details

For an excellent choice when you need to replace a broken valve or upgrade an old one, turn to this Waterloo pet grooming 2.6 GPM angled spray valve. It boasts a 2.6 GPM flow rate. The 9' coiled polyurethane hose provides plenty of room to maneuver around a pet grooming station as you give your furry friends a bath, but when not in use, it springs back to its coiled form to save you space and time from having to retract or manually re-coil a standard hose. It also features a 3/8" NPSM female connection.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.