


## **Z508**

## 9 [229] DIAMETER TOP EXTRA-HEAVY-DUTY DRAIN WITH SEDIMENT BUCKET

SPECIFIC	CATIO	N SHI	:E1
TAG			

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

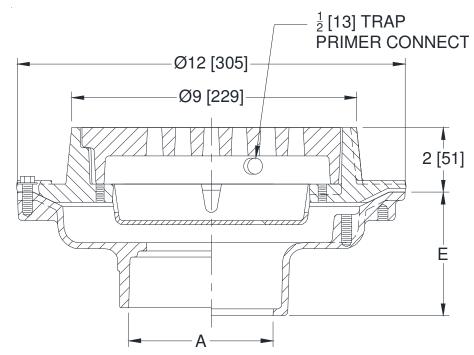

А	Approx.	Grate Open
Pipe Size	Wt.	Area
ln.[mm]	Lbs. [kg]	Sq. In. [cm <sup>2</sup> ]
2, 3, 4 [51, 76, 102]	22 [10]	10[116]
6 [152]	26 [12]	18 [116]

## **ENGINEERING SPECIFICATION:** ZURN Z508

9" [229mm] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame with integrated trap primer and plug for extra-heavy-duty cast iron deep flange slotted duresist grate with sediment bucket.

## **OPTIONS** (Check/specify appropriate options)

PIPE SIZE 4 [102] 4 [102] 4 [102] 2, 3, 4 [51, 76] 6 [152] 2, 3, 4 [51, 76]	-		ize/ty IC IG IP NH NH NL	pe) OUTLET Inside Caulk Inside Gasket Threaded No-Hub No-Hub Neo-Loc	'E' BODY HT. DIM. 3-3/4 [95] 3-3/4 [95] 2-3/4 [70] 4-3/4 [121] 5-1/4 [133] 3-9/16 [90]	
PREFIXES           Z         D.C.C.I. Body and Top*           ZB         D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2 [51] Dim. and 3/4 [20] to 9 [229] Dim.)           ZN         D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2 [51] Dim. and 3/4 [20] to 9 [229] Dim.)						
SUFFIXES	Acid Resisting Epoxy Coate Galvanized Cast Iron Heel-Proof Grate Secondary Strainer Solid Cover with Lift Handle Solid Gasketed Cover with L			TC TS VP 90	Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only) Top Secured with Slotted Screws Vandal-Proof Secured Top 90° Threaded Side Outlet Body (4 [102] Size Only)	

<sup>\*</sup> Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877-892-5216

Date: 10/16/2019 C.N. No. 141246 Prod. | Dwg. No. Z508