

**HotCube¹™ INSULATED
OUTDOOR HOT CABINET
MODEL HC1-UA-11
(PATENT PENDING)**

FEATURES AND BENEFITS:

- Industry's first line of propane heated hot cabinets allowing you to hold food safely outdoors*.
- Fully insulated holding cabinet keeps prepared foods at proper serving temperatures easily.
- Powerful, yet efficient, proprietary propane heating system maintains the right temperature to properly hold foods utilizing 8700 BTU's of heat. Safely hold up to 200°F (93°C).
- Ample capacity to hold up to 22 steam table pans or 11 sheet pans.
- Utilizes standard 1 lb. propane tanks for up to 8 hours of hold time. Also approved for 20 lb. tank use for longer hold periods.
- Heavy duty 8" pneumatic swivel casters, two with brakes. Rear casters are fixed to provides mobility when fully loaded, and stability during transport even in tough outdoor conditions.
- Easy visual sight glass to see propane flame.
- Piezo ignition system.
- Available body and rail custom colors or add a vinyl or magnetic door with your logo!
- Eleven sets of locking transport angles accommodate a variety of pan sizes on adjustable 1-1/2" centers. Provides capacity for up to (22) 2 x 20 steam table pans.

**Recommended for outdoor use only*




HC1-UA-11



**ACCESSORIES and OPTIONS
(Available at extra cost):**

- ☐ 20 lb. Hose Adapter
- ☐ Door Window
- ☐ Customized Logos/Powder Coating
- ☐ Fitted Drip Tray
- ☐ 6" Hi-Modulus Casters

See page B-30 for accessory details.

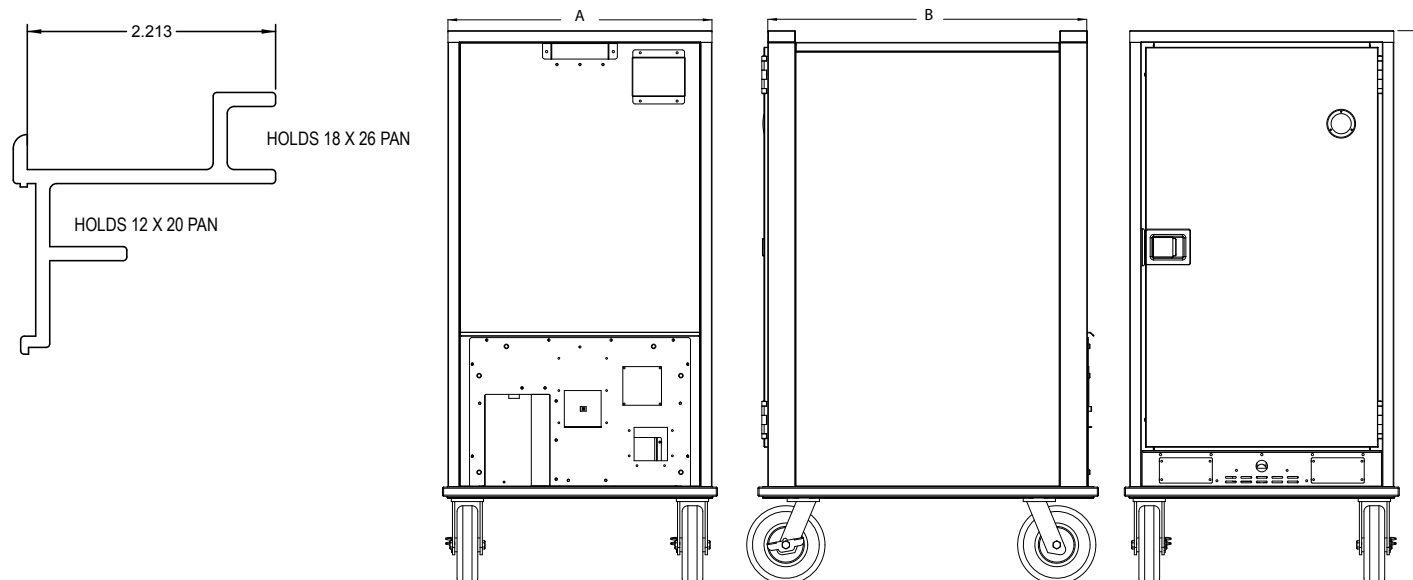

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
HC1-UA-11	11 SETS	SEE NOTE BELOW	IN	28-3/4	37	60-1/8	22	27	42	LBS	408
			MM	730	940	1527	560	690	1070	KG	185

NOTE: Pan sizes 18" x 26" (460 x 660) Bun Pans, 12" x 20" (305 x 510) Steam Table Pans.

CABINET:

- Inner body: 20 ga. stainless steel.
- Outer body: .063 aluminum, powder coated red.
- Reinforcement: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in door, back, top and sidewalls.
- Push/pull handles (2) powder coated black.
- 1-1/4" Sight glass for flame detection.

BASE:

- One piece construction, .060 stainless steel.
- Casters: 8" dia., (2) swivel (2) fixed, never flat, load cap. 310 lbs. each, Double ball bearings. Front casters equipped with brakes.

DOOR:

- Formed 22 ga. stainless steel.
- Latches: Polished stainless steel, slam type; mounted inboard.
- Gasket: Perimeter type.
- Thermometer: Analog.

TRANSPORT PAN SLIDES:

- Extruded aluminum; mounted on locking lift-off posts.
- Spaced on 3" centers; adjustable on 1-1/2" centers.

HOT UNIT COMPONENTS:

- Propane powered heating system.
- Burner: 8700 BTU's
- Thermostat: 140°F to 200°F.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Hot Cabinet Model HC1-UA-11 outer of .063 aluminum, stainless steel internal frame. (11) sets locking transport angles for multiple pan sizes, adjustable spacing every 1-1/2". Inner body stainless steel. Fiberglass insulation in sides; doors, back, top, and sidewalls 1-1/2". Interior coved corners. Hose out cleaning capability. One piece base, stainless steel. 8" all-terrain wheel, front swivel with brake rear wheels are fixed. Load capacity 310 lbs. each. 2 year parts warranty. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____.

CSA-US, CSA-C listed, CSA Sanitation, CSA Gas Canada and CSA design certified US.



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2017 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936