




POWER PACK - AIR COOLED

ECONOMY - 1 PUMP - 1,700 BTUs

- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Expanded urethane foam insulates cabinet to maintain glycol temperature and minimize condensation.
- Exterior sight glass to verify glycol bath level.
- Anti-vibration pads reduce motor noise.
- Rugged stainless steel cabinet.
- Equipped with Smart Draft™, a temperature monitoring technology.



MMPP4300-35



5-15P



CE

www.micromatic.com • 1 (866) 327-4159

1/4 HP COMPRESSOR

Job Number: _____ Location: _____

SPECIFICATIONS

Micro Matic reserves the right to change specifications without notice.




PART NO.	DESCRIPTION	SHIPPING WEIGHT
☐ MMPP4300-35	Air cooled power pack, 1 vertical pump, equipped with Smart Draft™	35 kg 77 lbs

OPERATING PERFORMANCE

COMPRESSOR	1/4 HP	CHARGE	0.18 kg (6.53 oz)
BTU PER HOUR	1,700	REFRIGERANT RUNNING PRESSURE	185 (low) - 244 (high)
PLUG TYPE (NEMA #)	5-15P	BATH CAPACITY	17 litre (4.5 gallons)
CORD LENGTH	8'	PUMP TYPE	Vertical
VOLTAGE	115	CABINET COVER	Included
RUNNING	5A	3/8" BARB	9.525mm (3/8") O.D.
REFRIGERANT	R-134a	Power pack equipped with SMART DRAFT™, a temperature monitoring technology.	

DIMENSIONS

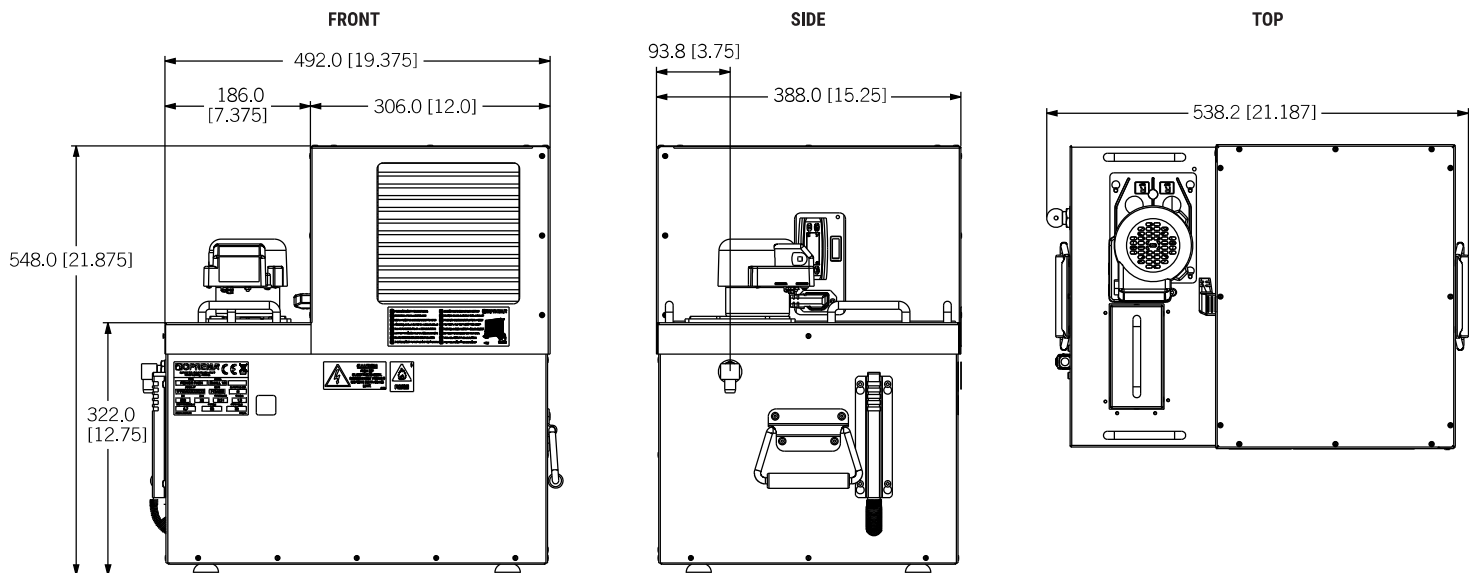

Toll-Free: 1-866-327-4159
www.micromatic.com

West

19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central

10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557

Southeast

15111 Dispense Ln.
Brooksville, FL 34604
Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466