
Single Lamp Mounted Warmer

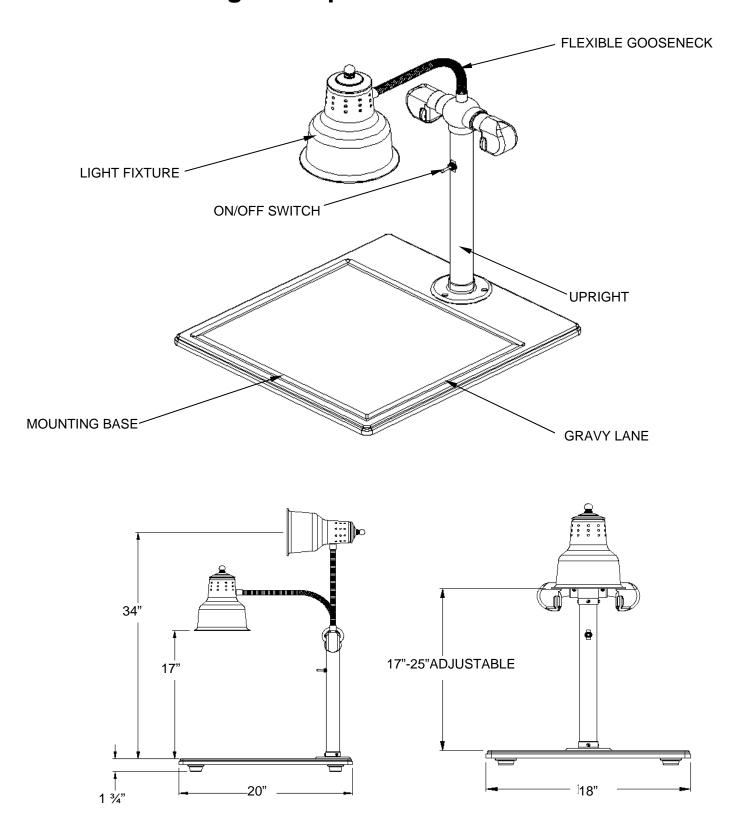

Hanson Brass Products 7530 San Fernando Road, Sun Valley, California, 91352 Toll Free (888) 841-3773, Fax (818) 767-7891 Website: www.hansonbrass.com

Single Lamp Mounted Warmer

Description: Single heat lamp fixture mounted on an 18" x 20" x ¾ thick solid surface base. Base to be routed with gravy lane. Brass surfaces have a clear baked enamel finish. All internal components including lamp socket and wiring are high temperature rated (200°C). Lamp body and fittings constructed of solid brass. Switch is rated for 15 amps @ 120 volts.

amps @ 120 voits.		
Standard Models		
Model Number	Description	
SLM/BB	Single lamp mount	ted warmer on "black granite pattern" solid surface
	base in Brass finis	h
SLM/BB/CHROME	Single lamp mount	ted warmer on "black granite pattern" solid surface
	base in Chrome fir	
SLM/BB/COPPER		ted warmer on "black granite pattern" solid surface
	base in Copper fin	
SLM/WB	Single lamp mounted warmer on white solid surface base in brass finish	
SLM/WB/CHROME	Single lamp mounted warmer on white solid surface base in Chrome finish	
SLM/WB/COPPER	Single lamp mount finish	ted warmer on white solid surface base in Copper
C		se material and sizes also available
Specifications		
Mechanical		
Parameter		Value
Base material		Solid surface standard, pewter platter or granite
		upon request
Base size		18" x 20" x 1 3/8 " thick(includes non slip feet)
Light head material		Brass plated spun aluminum
Light head		Approximately Ø6.50" x 9.0" long
Light head height from base		Adjustable 17"-34"
Upright and all fittings		Solid brass
Shipping weight		Approximately 32 pounds
Internal wiring		18 gauge Silver stranded with Teflon insulation. Rated (200° C)
Lamp socket		Glazed porcelain/nickel. Rated (200° C)
Switch		On/Off rated 15 amps @ 115 VAC
Power cord		115 VAC-18 gauge 3 conductor cable 84" long with Nema 5-15P plug (standard) 230 VAC-18 gauge 3 conductor harmonized cable 84" long with Schuko plug (standard)
Electrical		
Operating Voltage		115-230, VAC 50-60 Hz, single phase
Power		250 watts Maximum
Operating amperage		2.25 amps (115 VAC) 1.25 amps (230 VAC)
Lamp type		Infrared 250 watts maximum, shatterproof design.
Safety Listings		
Organizations		en CE CO