



# XADA-06FS-GXLS

Project	_____
Item	_____
Quantity	_____
Date	_____

**Model**  
CHEFTOP-X™ Digital.ID™

 **Energy efficiency 113.6 kWh/day - 20.6 kg CO<sub>2</sub>/day\***

\*More details on the last page.

Combi oven	Gas
6 trays 18"x26"	Hinge on the right side
16" Touch control panel	
Voltage: 120V 1N~	



## Description

Professional high-performance combi oven equipped with a state-of-the-art operating system and intelligent technology designed to perfectly handle any gastronomy, pastry and bakery cooking process. ENERGY STAR® certified, this oven is designed to preserve energy while maintaining perfect cooking performance. CHEFTOP-X™ has a cooking chamber moulded in 316L steel and an integrated RO.Care water filtering system. It is equipped with an integrated microphone to enable voice control and interaction with UNOX's Corporate Chefs to receive cooking assistance directly through the interactive panel. The Digital.ID™ advanced operating system allows to save the entirety of one's favorite settings on the account and to transfer them from one oven to another in a few seconds. With the Digital.ID™ app, it is possible to control the oven through smartphones as well as customize accounts.

## Manual set

- **Cooking steps:** up to 9
- **Temperature:** 86 °F - 572 °F
- **Preheating:** up to 572 °F
- **CLIMA.Control:** humidity setting from 10% to 100% and continuous measurement of the actual humidity present in the cooking chamber
- **Fan speed:** 5 continuous speeds (2,700 rpm) and 2 AIR.Tornado speeds (3,600 rpm)
- **Storable programs:** 1000+
- Delta T cooking with core probe

## Preset

- Customisable semi-automatic programmes. They suggest temperature, ventilation and humidity settings based on the type of cooking chosen by the operator (grilling, browning, steaming, etc.).

## Automatic set

- **Individual.CHEFUNOX:** intelligent feature that asks for users' feedback on recently completed cooking processes. It uses machine learning technology to evaluate the feedback received, learn operator preferences, and improve preset cooking programmes in the built-in cooking library. Parameters will automatically be set for the next cooking procedure
- **MULTI.Time:** manages and monitors up to 10 cooking processes at the same time

## Advanced cooking features

### Unox Intelligent Performance

- **ADAPTIVE.Cooking™:** automatically adjusts the cooking parameters according to the food load to ensure repeatable results
- **SMART.Preheating:** automatically sets the temperature and duration of the preheating according to the previous modes of use
- **SENSE.Klean:** estimates the degree of dirt of the oven and suggests the most suitable automatic washing
- **SMART.Energy:** automatic energy-saving function that minimises water, electricity or gas consumption in programmes exceeding one hour of cooking time. It recognises the absence of food in the cooking chamber and activates the stand-by mode reducing temperature and consumption. Analyzes oven usage to provide energy-saving tips (e.g. warns that the door has remained open for too long)
- **HEY.Unox:** voice recognition technology that allows to interact with the oven, giving commands and receiving audio-visual feedback directly on the panel. Available upon Premium upgrade
- **OPTIC.Cooking:** intelligent technology that enables the oven to recognise food and automatically start the appropriate cooking programme when cooking in MULTI.Time mode. Available upon Premium upgrade. The accessory kit is to be purchased separately





# XADA-06FS-GXLS

## Advanced cooking features

### Unox Intensive Cooking

- **DRY.Maxi™**: removes large amounts of moisture from the cooking chamber in an ultra-short timeframe
- **STEAM.Maxi™**: produces a large amount of saturated steam in the cooking chamber in ultra-reduced time
- **AIR.Maxi™**: multi-fan system with reversing
- **CLIMALUX™**: measures and regulates the actual humidity in the cooking chamber
- **AIR.Tornado**: improves and speeds up the cooking of full loads of food thanks to the possibility of setting a higher rotation speed of the oven fans up to 3,600 rotations per minute (rpm)

## Main features

- Sturdy stainless steel external structure for maximum thermal insulation
- All-stainless-steel slam shut door
- Integrated ultra-bright 16" capacitive control panel
- Cooking chamber in AISI 316L stainless steel for maximum corrosion resistance
- Motors with reversing multi-fan system and symmetrical linear heating elements with high power density
- Compacted covering with welded stainless steel tube lattice frame
- Double LED bar with warm and cold tone adjustment integrated in the door
- **PRESSURE.Klean**: automatic washing system with recirculation
- Integrated **DET&Rinse™** detergent container
- **RO.Care**: integrated resin filter system that neutralizes the formation scale. It filters up to 1300 L of water with one cartridge and is equipped with a filter exhaustion sensor
- **Digital.ID™** Operating System
- Built-in microphone enabling call and voice control functions
- Built-in Wi-Fi internet connection
- **HACCP Data Download**
- Built-in hand shower
- Triple glazing to minimise heat loss and maximise energy efficiency
- C-shaped perforated tray supports with anti-overturn system
- Drip tray connected to the drain and Integrated into the door. Functioning also when the door is open
- Motor speed adjustable between 900 rpm and 3600 rpm
- **MULTI.Point** core probe with 4 measuring points

## Accessories

- **Ventless hood**: steam condensing hood
- **Ventless hood with catalysts**: steam condensation hood with catalysts
- **Neutral cabinet**: recommended solution to optimize your kitchen layout and always have everything in the right place
- **Stand**: the multifunctional support ideal for storing trays safely and placing your oven at the perfect height to work
- **HYPER.Smoker**: smoker box for wood chips and sawdust to smoke inside the cooking chamber without extra electrical supply
- **DET&Rinse™ ULTRAPLUS**: cleaning and rinse agents to combine maximum cleanliness with minimum consumption and long life for your oven




# XADA-06FS-GXLS

## DIGITAL ID



## DATA DRIVEN COOKING

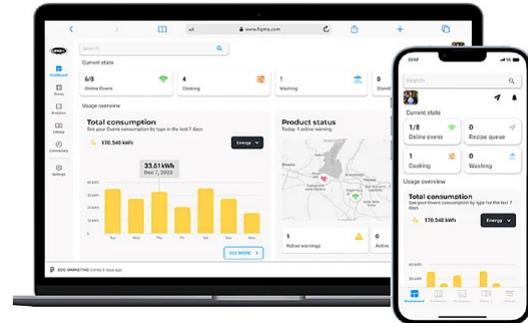

### Digital.ID™

- By creating a Digital.ID™ account every professional can access the oven conveniently from their mobile device. Once the oven is connected to the internet, every cooking programme, configuration or customisation of the Digital.ID™ interface is saved in the cloud and available everywhere. The account remains constantly synchronised with the most recent changes.

### Premium

- All Base features
- LONG.Life 5 warranty extension
- COOKING.Concierge (30 min/month)
- HEY.Unox voice control
- OPTIC.Cooking (accessory which must be purchased separately)

### Base

- Interface personalisation
- CHEFUNOX / SPEEDUNOX libraries
- Digital.ID™ app
- Profiles management
- DIGITAL.Training
- Live Technical Assistance

For more information visit [unox.com](http://unox.com) | [Digital.ID™ Premium](#)

### Data Driven Cooking

- Controls and monitors oven operations in real time, highlighting waste and suggesting usage improvements to reduce consumption. It allows to create and share recipes from one oven to another even remotely

### Enterprise


- All Professional features
- Unlimited connected ovens
- Full analytics data history
- Multi-account access management
- Unox service remote monitoring
- Technical support
- REST API add-on
- Kitchen Scheduler add-on
- Digital Services add-on
- OPTIC.Cooking add-on

### Professional

- Up to 5 connected ovens
- Cooking program management: creation, editing and sending to ovens
- Ovens management through group and map visualisation
- Documentation for HACCP compliance
- Real-time usage monitoring
- Push notifications
- Community with unox recipe book
- 3-day analytics data history

For more information visit [unox.com](http://unox.com) | [Data Driven Cooking](#)

# XADA-06FS-GXLS

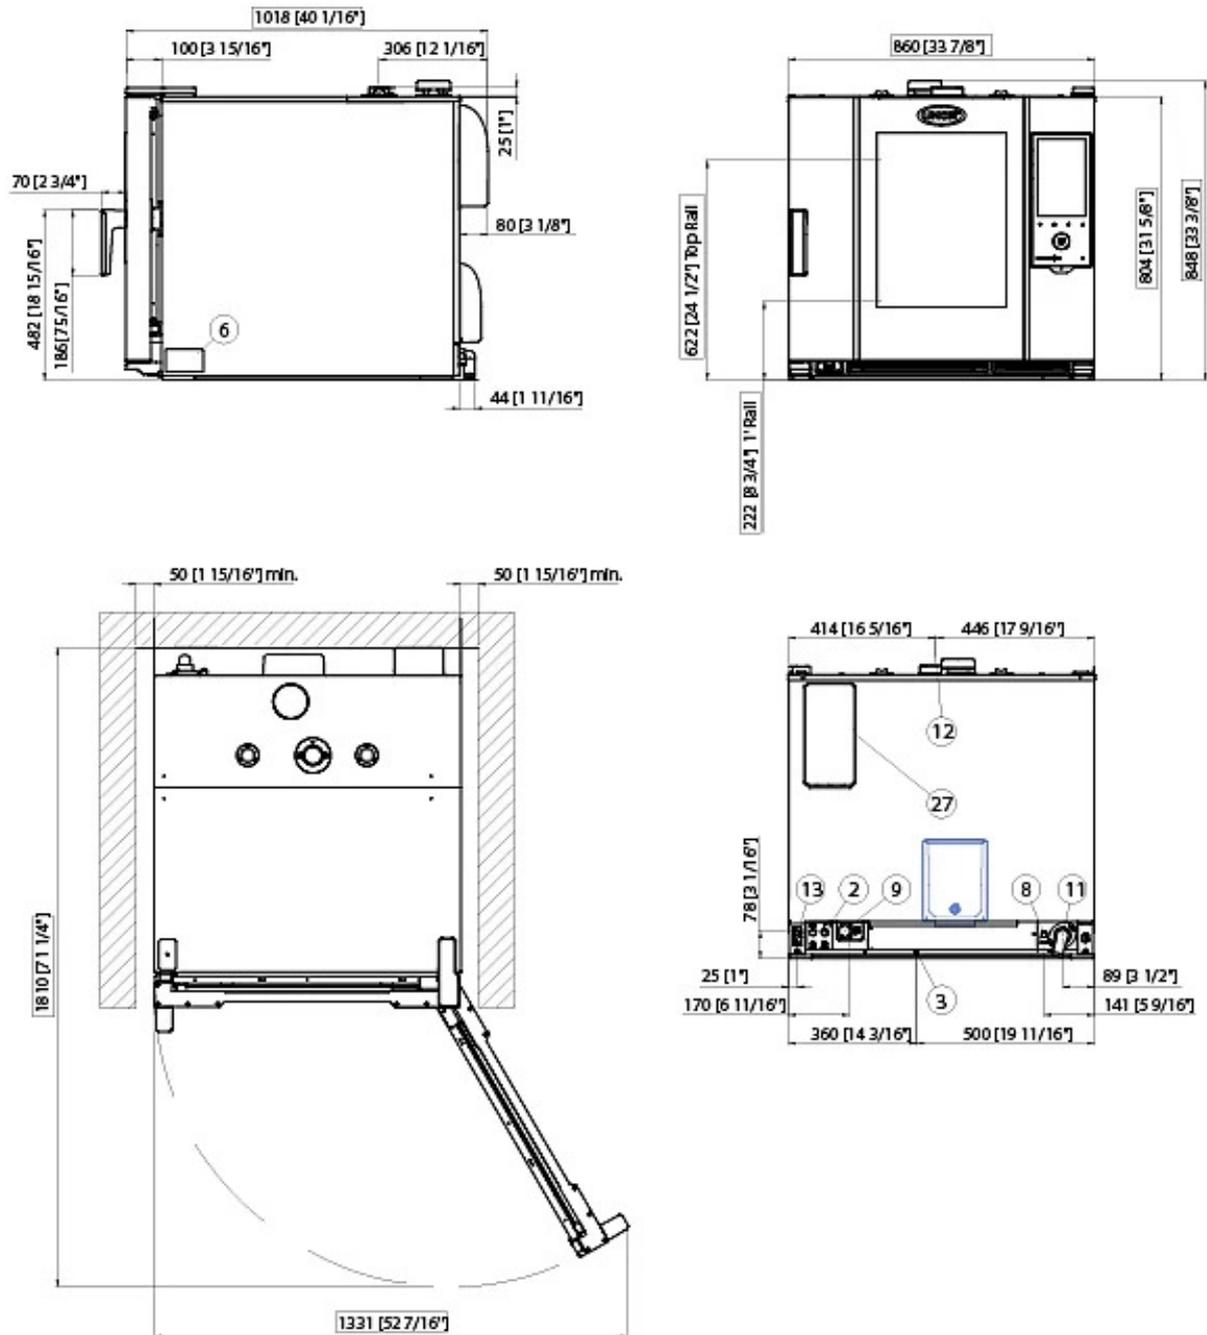

## Dimensions and weight

Width	33-7/8"	860 mm
Depth	41/16"	1018 mm
Height	33-7/16"	849 mm
Net weight	302 lbs	137 kg
Tray pitch	3-1/8"	80 mm

## Connection positions

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
8	3/4" female NPT water inlet
9	3/4" Gas inlet
11	Chamber drain pipe

12	Hot fumes exhaust chimney
13	Accessories connection
27	Cooling air outlet



# XADA-06FS-GXLS

## Electrical power supply

### OPTION A

Voltage	120 V
Phase	~1PH+PE
Frequency	60 Hz
Total power	1,4 kW
Max Amp draw	11 A
Required breaker size	15 A
Power cable requirements*	3 x AWG 14
Plug	NOT INCLUDED

\*Recommended size - observe local ordinance.

## Gas power supply

Gas type	NG	LPG
Nominal gas power	27 kW / 92127 BTU/h	27 kW / 92127 BTU/h
Inlet pressure	5-40 mbar	5-40 mbar
Gas valve orifice	-	550/100 MM
Hook-up	3/4" NPT MALE	3/4" NPT MALE

## Energy efficiency

Consumption 113.6 kWh/day

CO<sub>2</sub> emission 20.6kg CO<sub>2</sub>/day\*\*

\*\*The estimate includes only direct emissions produced by the oven. Indirect emissions can be reduced to zero by choosing to purchase energy from renewable sources.

### Estimate based on daily use of the oven (300 days/year):

6 light loads of roast chickens (loaded at 20%), 1 full load of roast potatoes, 3 full loads of steamed vegetables, 2 hours in an empty oven at 180 °C.

### Estimated assuming the following weekly washing programs (42 weeks/year):

1 long wash per week, 1 medium wash per week.

Register to DDC Service to access data and product specifications.  
[www.ddc.unox.com](http://www.ddc.unox.com)



# XADA-06FS-GXLS

## Water Supply

USING A WATER SUPPLY THAT DOES NOT MEET UNOX'S MINIMUM WATER QUALITY STANDARDS WILL VOID ANY WARRANTY.

It is the responsibility of the purchaser to ensure that the incoming water supply is compliant with the listed specifications through adequate treatment measures. One water tap per oven is required.

**Line pressure:** Drinking water inlet: 3/4" NPT, line pressure: 1.5 to 10 Bar; 21 to 87 psi (2 Bar; 29 psi recommended)

### Inlet water specifications

**Free chlorine** ≤ 0.5 ppm

**Chloramine** ≤ 0.1 ppm

**pH** 7 - 8.5

**Electrical conductivity** ≤ 1500 µS/cm

**Total hardness (TH)** ≤ 30° dH (534 ppm)

**Chlorides** ≤ 250 ppm

\*this value refers to daily steam cooking of 1- 2 hours.

In any case, if with a total hardness ≤ 8°dH there is still production of limescale, it is mandatory to treat the water in order to avoid limescale production. We recommend water treatment systems based on ion exchange resins. Water treatment systems based on polyphosphates are not allowed. Total water hardness can be measured using the KSTR1082A kit with equivalent tools.

## Water drain

### Properties

Pvc drain (or similar according to market HACCP requirements) 40 mm positioned on the floor and behind the column

## Installation requirements

Unox products must be installed in facilities where all the systems (gas, electric, hydraulic, ventilations, aerations, etc.) comply with the current national standards. Combustion analysis must be performed in case of gas ovens.

Register to DDC Service to access data and product specifications.  
[www.ddc.unox.com](http://www.ddc.unox.com)