
# **ASHLAND**<sup>®</sup>

## Large Capacity Grease Interceptors

The *ASHLAND*°APGI Series Grease Interceptor is designed to separate grease, oils, fats and other sediment from large Commercial and Industrial sources. Made of seamless High Density Polyethylene (HDPE), the APGI series interceptor is lightweight, cost efficient, extremely durable and corrosion free. Non skid 3/4" poly covers with recessed handles are standard, but all units are available with steel or aluminum non-skid tread plates for traffic areas. The HDPE construction is acid resistant and solids do not easily adhere to the smooth walls, making cleaning effortless.

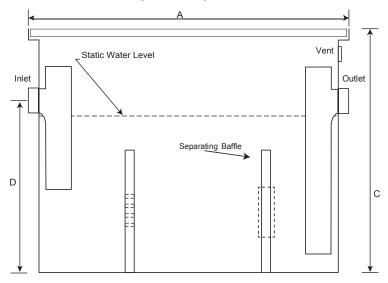

#### **Options Include:**

- Above or below ground installation
- Aluminum/Steel non-skid cover for pedestrian traffic
- Bolt on Extensions available
- Optional Connection Sizes 2, 3, 4, & 6 inch
- PVC glued connections are standard
- HD Braces for above ground installation

Special sizes available to fit through narrow passages or existing walkways. Special units also available to meet larger capacities, including systems that utilize series and/or parallel interceptors. Straight through, left and right hand models available.

**Model Number APGI-100 APGI-225 APGI-250 APGI-350 APGI-150** Flow Rate G.P.M. 100\*\* 150\*\* 225 250 350 Grease Capacity (lbs.) 250 350 500 625 850 53 77 Approximate Length (A) 53.5 53.5 77 41 **Dimensions** Width (B) 29.5 41 29.5 41 49.5 Height (C) 32 49.5 61 (inches) 45 Bottom of Unit to center of Inlet/ 25 42 42 53 37 Outlet (D) Bottom of Unit to center of vent NA 45 45 57.5 40 2 2 2 NA Vent Connection (in.) 2 **Approximate Weight (lbs.)** 425 200 350 475 650 **Standard Inlet/Outlet (in.)** 3" 4" 4" 4" 6" Liquid Holding Capacity (gal) 125 186 300 405 560

DIMENSIONS & SPECIFICATIONS (ALL DIMENSIONS APPROXIMATE DUE TO PLASTIC VARIANCES)

\*\*Adjustable inlet/outlet can be set at different heights to provide an integral extension contact for more information.

Call about small standard size Interceptors / Traps for grease, oil, solids, lint & hair. www Ashlandpolytraps.com PH. 800.541.8004

\*Design varies slightly by model

REVISED 2-2015


# **ASHLAND**<sup>®</sup>


## Lint & Solids Interceptors

**The ASHLAND**<sup>°</sup> **AP Series Lint and Solids Interceptor** is designed to capture lint and other sediment from commercial washing machines and other drain sources. Made of seamless High Density Polyethylene (HDPE), the AP series interceptor is lightweight, cost efficient, extremely durable and corrosion free. Non Skid poly covers are standard. All units are available with diamond tread plates for heavy foot traffic areas. The HDPE construction can withstand the corrosive effluent from laundry waste and the smooth walls make cleaning effortless.

### **Options Include:**

- Above or below ground installation
- Steel covers for moderate pedestrian traffic
- Aluminum nonskid overlays for light pedestrian traffic
- Bolt on extensions
- Optional connections sizes 2,3,4, & 6 inch
- HD braces required on larger models for above ground installation
- Recessed lift handles standard on <sup>3</sup>/<sub>4</sub>" poly lids for 100-350







#### DIMENSIONS & SPECIFICATIONS (ALL DIMENSIONS APPROXIMATE DUE TO PLASTICS VARIANCES)

Model Number Lint Interceptor		APLI- 10-1	APLI- 25-3	APLI- 50-7	APLI- 75-10	APLI- 100-30	APLI- 150-35	APLI- 225-45	APLI- 250-50	APLI- 350-70
Model Number Sediment Interceptor		APSI-10	APSI-25	APSI-50	APSI-75	APSI- 100	APSI- 150	APSI- 225	APSI- 250	APSI- 350
Number of Machines		1	3	7	10	30	35	45	50	70
Flow Rate G.P.M.		10	30	70	100	300	350	450	500	700
Approximate Dimensions (inches)	Length (A) Width (B) Height (C)	23 19.5 14	32.5 22 19	37 25 19	44.25 25 25	53.5 29.5 32	53.5 29.5 45	53 41 49.5	77 41 49.5	77 41 61
Bottom of Unit to center of Inlet/Outlet (D)		9.25	13.5	13.75	19.75	25	37	37	42	53
Bottom of Unit to center of vent 2"		NA	NA	NA	NA	NA	40	45	45	57.5
Standard inlet/outlet connection		2"	2"	2"	3"	4"	4"	4"	6"	6"
Approximate Weight (lbs.)		25	40	65	80	200	350	425	475	650
Basket with 3/16" perf.		Y	Y	Y	Y	Ν	Ν	Ν	Ν	Ν
Removable Baffles 1/8" perf.		Y	Y	Y	Y	Y	Y	Y	Y	Y
Fixed baffle 1/8" perf.		Ν	Ν	N	N	Ν	Ν	N	N	Ν

Call about small standard size Interceptors / Traps for grease, oil, solids, lint & hair. www.Ashlandpolytraps.com PH. 800.541.8004