

## AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476.9000 • (914) 476.0688 www.americanspecialties.com

 MODEL №:
 137

 ISSUED:
 JAN 1987

REVISED: 4 JAN 2022

# **BOOKSHELF WITH FOUR (4) SECURITY SAFETY CLOTHES HOOKS (FRONT MOUNT)**

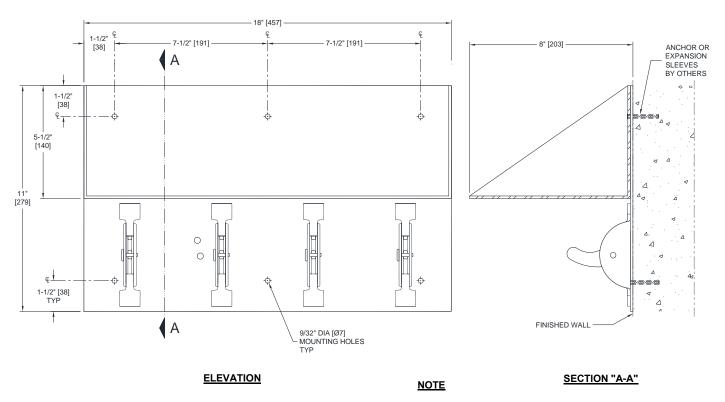

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

## **SPECIFICATION**

Bookshelf with four (4) Security Safety Clothes/Towel Hooks for surface mounting shall be type 304 stainless steel alloy 18-8. Hooks shall be 7 gage, brackets shall be 11 gage, back plate and bookshelf shall be 14 gage. Safety hook tension is adjustable by means of a captive round head stainless steel spanner screw. Hooks shall smoothly drop down when load exceeds 35 lb (16 kg) limit when correctly set. Hook geometry and bracket shall prevent hooks from being set in vertical-up position. All exposed surfaces shall have satin finish. All seams shall be welded and ground smooth. The unit is provided with six (6) clear mounting holes that shall accept 1/4"-20 x 2" long (M6 x 51) stainless steel pin-Torx® button head machine screws (supplied).

Bookshelf with four (4) Security Safety Clothes/Towel Hooks shall be Model № 137 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913

### INSTALLATION

For compliance with 2010 ADA Accessibility Standards, install unit so that shelf is no more than 48" [1219] Maximum Above Finished Floor. Surface mount unit on finished wall with six (6) 1/4"-20 x 2" long (M6 x 51) pin-Torx® button head machine screws (provided) into wall anchors (by others) or alternate wall preparation (by others) through mounting holes provided.

#### **OPERATION**

An 18" W [457] x 8" D [203] bookshelf is provided with triangular sidewalls to function as bookends. Clothes/towel hooks will release down when overloaded beyond the 35 lb (16 kg) limit. Hook tension may be adjusted to maintain trip threshold over the life of the product