




## **ACCESSORIES**


- Light Kit
- Ceiling Radiation Damper
- Special Order Factory Options:
  - Humidistat
  - Motion Sensor

## **CONTROL CENTRE**



SPEED SETTING TIME DELAY SETTING

## **DIMENSIONS**

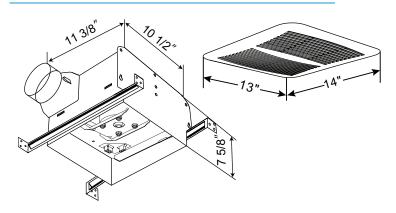

# **CEPD140-4**

#### **Ultra Quiet Ceiling Exhaust Fans with EC Motor**

Canarm's CEPD140-4 fan is ultra quiet and includes an EC motor for energy efficiency. Choose from 4 different CFM's using built in dip switches, and a second adjustable speed for continuous operation for whole house/building ventilation.


## **FEATURES**

- Ultra quiet.
- High performance and efficiency.
- Two speed totally enclosed EC motor with thermal protection.
- Selectable 80, 90, 110, 140 CFM
- · Continuous low speed operation (adjustable).
- Time delay 5-30 minutes.
- Complies with ASHRAE 62.2 whole house fan to meet minimum ventilation required by local building codes.
- 6" Poly Collar with built in backdraft damper.
- Premium low profile poly grille.
- ETL listed for tub and shower when connected to a GFCI.

### PERFORMANCE SPECIFICATIONS

MODEL	STATIC PRESSURE (IN W.G.)	CFM	SONES	WATTS	POWER (V/HZ)	DUCT DIAMETER
CEPD140-4	0.1	80	< 0.3	5.6	120/60	6"
		90	< 0.3	6.5		
		110	< 0.3	8.5		
		140	0.5	13.0		
	0.25	49	0.9	7.8	120/60	6"
		57	0.9	8.3		
		83	1.0	10.6		
		117	1.0	14.5		

## **FAN CURVES**



Fan Flow Rate - CFM Standard Air