

INSULATED HALF SIZE PASS-THRU STAINLESS STEEL HOT CABINET MODEL H-138-NPS-CC1MC5Q

FEATURES AND BENEFITS:

- Fully insulated 1/2 size hot cabinet keeps prepared foods at serving temperatures. Ideal for pizza and side items. Includes lighted cavity.
- Pass-thru design allows for access from preparation and serving areas.
- Powerful, yet efficient, 1400 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F (93°C).
- Control panel has easy-to-read thermometer.
- Internal frame in body maintains structural rigidity.
- Stainless steel construction throughout for ease of cleaning. One piece extended base protects cabinet body.
- Smooth interior coved corners prevent food particles/grease buildup.
- Insulated door on front has pull handle, self-closing hinges and tempered glass window.
- Rear door has high temperature magnetic latch for "easy open"; twist-lock catch secures door during transport. Door has tempered glass window.
- Standard with right hand hinging; left hand hinging available upon request. Field reversible for flexibility.
- Safety-conscious anti-microbial latch protects against spreading germs.
- Four (4) adjustable gravity-fed wire shelves.
- 4" high nickel plated legs; adjustable to 5-1/2".



H-138-NPS-CC1MC5Q



NSF/ANSI 4




c US

ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Magnetic Door Latch
- ☐ Extra Wire Shelves
- ☐ Lock Hasp
- ☐ Extra Stainless Steel Angles
- ☐ Gravity-fed Wire Shelf for side items
- ☐ 1500 Watt, 150 Amp Power Unit
- ☐ Custom graphics for control panel and door

See page B-20 for accessory details.

H-138-NPS-CC1MC5Q

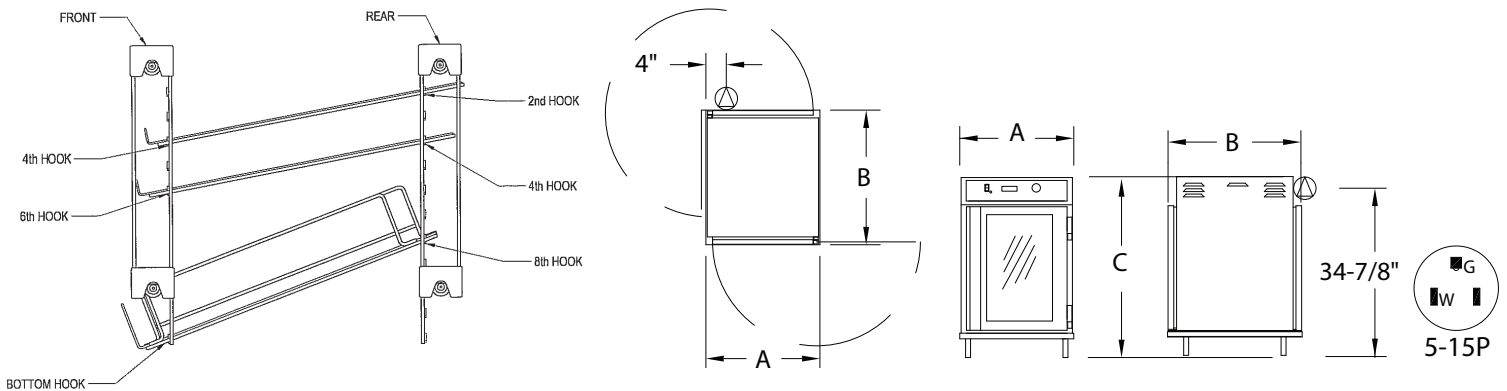

CRES COR MODEL NO.	SHELVES			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
H-138-NPS-CC1MC5Q	4	17-3/4" x 26-1/4"	IN	25	33	40-7/8	19-7/8	28	28	LBS	302
		450 x 667	MM	635	838	1609	505	718	1475	KG	137

When ordering bumpers, add 2" to overall dimensions.

CABINET:

- Body: Heavy duty stainless steel, 22 ga.
- Reinforcement: Heavy-duty internal framework of 18ga. stainless steel
- Insulation: Fiberglass, R-value = 6.82 at 75°F, 1-1/2" in door, 2" in sidewalls.
- Inner Top: (5) 40 Watt halogen lights.
- Interior coved corners.
- Air tunnels: Stainless steel, 22 ga.; lift out type, mounted on sides.
- Cord keeper on body side.

BASE:

- One-piece construction, .125 aluminum.
- Legs (4): Nickel plated zinc; height adjustable 4" to 5-1/2".

DOORS:

- Field reversible: Formed 22 ga. stainless steel.
- Door gaskets: Perimeter type, Santoprene with magnetic gasket.
- Hinges: Self-closing type.
- Full length pull handle on customer side.
- Magnetic latch: High pressure die cast zinc with anti-microbial handle on serving side.
- Doors have tempered glass windows.

RACK INSERT:

- Cavity has (4) adjustable gravity-fed merchandising rack inserts: (.243 dia) nickel chrome plated steel; mounted on removable posts.

POWER UNIT:

- Top mounted; removable with tools.
- Heater: 1370 Watts.
- Blowers (2) with intake guard.
- Thermostat: Electronic temperature control with digital temperature display. Display accurate to $\pm 2^\circ\text{F}$.
- Power cord: permanent 10 ft.
- Switch: On/Off rocker type
- Internal vent fans.
- High limits.

POWER REQUIREMENTS:

- 1400 Watts, 120 Volts, 60 Hz., single phase, 12 Amp. 15 Amp service.

SHORT FORM SPECIFICATIONS

Cres Cor Half-Size Insulated Pass-Thru Stainless Steel Hot Cabinet Model H138NPSCC1MC5Q. Cabinet 22 ga. stainless steel; stainless steel internal frame. Inner top has (5) 40 Watt halogen lights. Tempered glass doors on front and back, 22 ga. stainless steel. Fiberglass insulation in sides 2"; doors, top, base 1-1/2". Interior coved corners. 1400 Watt, 120 Volt power unit. (4) adjustable gravity-fed wire shelves. One piece insulated base, .125 aluminum. Adjustable legs: 4" to 5-1/2" high. 2 year parts warranty. Provide the following accessories: _____ . CSA-US, CSA-C, CSA to NSF4 listed.



Scan QR code to view Spec Sheet,
Operating Manual, Wiring Diagram
or to call Customer Service.

If you need a QR reader visit your App
Store on your Smartphone or Tablet.

CRES COR

5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2016 All rights reserved.

*In line with its policy to continually improve its products,
CRES COR reserves the right to change materials and
specifications without notice.*

Litho in U.S.A.