

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD72HC Solid Door Dual Towers With Dual Faucets Hydrocarbon Series

MODEL: DD72HC-1-B



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy-duty stainless steel
- Full electronic control
- Dual towers with dual faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing doors with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible doors (hinge kit not included)
- Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- Stainless steel interior lining
- Stainless steel back
- Shelves
- Shelf clips
- · Custom tower hole location
- Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- Right or left hinged door
- 3"- 6" Casters or 6" black legs
- 1- 6 Tap tower
- 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	DD72HC-1-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall	24 %"	
Height Overall (floor to top of tap)	51 1⁄4"	
Number of Doors	3	
Depth with Door Open 90°	42 % "	
Door Openings (in)	17 ¾" x 29 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.95	
Internal Width Useable (in)	60 1⁄4"	
Internal Depth Overall (in)	18 ¾"	
Internal Height Overall (in)	27 %"	
Number of 1/2 Kegs	3	
ELECTRICAL DATA		
Full Load Amperes	3.1	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	1942	
Heat Rejection (BTU/Hr)	2913	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.94	
SHIPPING DATA		
Gross Weight - Crated	424 lbs	
Height - Crated	40"	
Width - Crated	75"	
Depth - Crated	26"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- $1/4^{\circ}$. Metric dimensions (MM).



Bar Equipment-Direct Draw Beer Dispenser Model: DD72HC-1-B

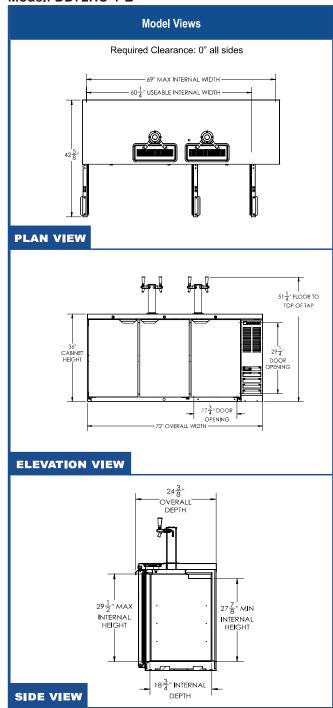







115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

