



**CONTRACTOR
LIGHTING & SUPPLY**
WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #


DIE-CAT ALUMINUM LED EMERGENCY EXIT COMBO



FEATURES

- High performance premium grade, ultra-bright white LED lamps
- Ultra-bright, energy efficient, long life Red or Green LED
- Internal solid state transfer switch automatically connects the internal battery to LED broad and LED lamp heads for minimum 90 minute emergency illumination.
- First premium grade die cast combo in the market. Unique new design provides spec grade EXIT sign with LED lamp heads in one low profile housing.
- Premium grade, extruded aluminum housing.
- Available in black or white powder coated finishes.
- Charge rate/ power "ON" LED indicator light with test button.
- Universal K/O pattern on back plate for wall mount.
- In-the-field knockout chevron directional indicators.
- Quick snap face plate closure.
- Aluminum mounting canopy included for top or end mount.
- 8.4V long-life, maintenance-free, rechargeable NiCad battery.
- Unique design allows double face conversion in the field.
- Dual 120/277 Volt
- 3 Watt (1 LEDs x 3 Watts) per head.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

DIMENSIONS

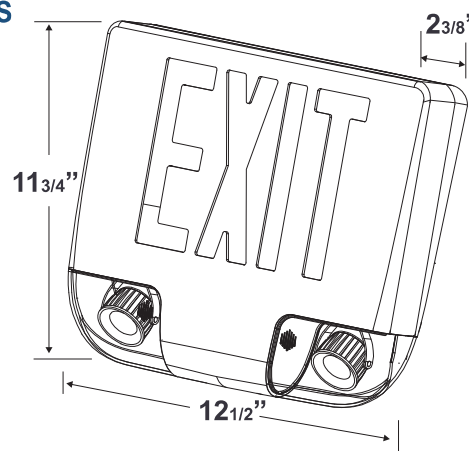

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for damp locations. (0°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

MODEL	NO. of FACES	LETTERS	HOUSING	FACE PLATE	BATTERY
02-CXA	1 Single Face 2 Double Face	R RED G GREEN	W WHITE B BLACK A ALUMINUM	W WHITE B BLACK A ALUMINUM	B Battery Back-Up RC Remote Capacity