

XLERATOR[®] HAND DRYER RECESS KIT



£.*

*** MEETS ADA PROTRUSION REQUIREMENT OF 4 INCHES (102 MM) ***



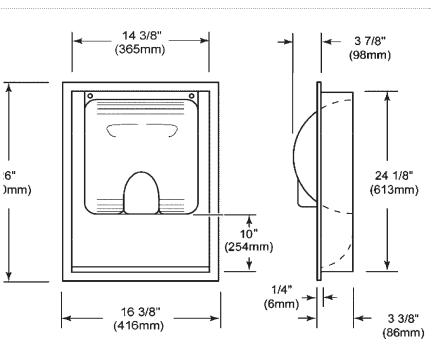

40502 Recess Kit, Brushed Stainless Steel

WEIGHT

11 lbs. (4.99 KG)

OVERALL DIMENSIONS

16 3/8" wide x 26" high x 3 3/8" deep (416 mm wide x 660 mm high x 86 mm deep)

ROUGH WALL OPENING

14 1/2" wide x 24 3/8" high x 4" deep (368 mm wide x 619 mm high x 102 mm deep)

CONSTRUCTION

Wall box is fabricated of 22 GA 18-8 type 304 stainless steel with #4 satin finish with 16 GA 18-8 type 304 stainless steel dryer mounting plate. All welded construction.

INSTALLATION GUIDE (CONSULT LOCAL ADA CODES)

EXCEL

When installed, bottom of hand dryer will be 10" (254 mm) above bottom of rough wall opening. Therefore, bottom of rough wall opening should be 10" (254 mm) below suggested mounting height for hand dryer. (See suggested mounting heights above). 18-8 type 304 stainless steel dryer mounting plate. All welded construction.



Part ID	Description	List Pric
40502	Recess Kit, Brushed (for ADA 4" protrusion	
40502SP	Recess Kit, Custom Color Painted\$25(for ADA 4" protrusion requirements)	
Part ID	Description	UPC#
40502R	Red Baron	70025113198
40502B	Raven Black	70025112951
40502SP	Special Paint	70025113199
40502GR	Graphite	70025113439
40502W	White	70025112952

EXCELDRYER.COM

JULY 2020

SUGGESTED MOUNTING HEIGHTS (FROM FLOOR TO BOTTOM OF DRYER)

DRYER INC

Men's	45" (114 cm)	Children	35" (89 cm)
Ladies'	43" (109 cm)	Accessible	37" (94 cm)
Teenagers'	41" (104 cm)		

1.800.255.9235

THROW IN THE TOW

