



# BEVERAGE-AIR®

## VISTA® BOTTOM MOUNT REACH-IN FREEZER

### Model: FB12HC-1S

SOLID DOORS



PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
APPROVED: \_\_\_\_\_

### 7 YEAR WARRANTY Parts, Labor, and Compressor

#### CABINET CONSTRUCTION

- Stainless steel front and door, gray painted sides
- Gray painted aluminum interior
- Full electronic control
- LED lighting
- Self-closing door with 120° stay-open feature, on spring-loaded hinges
- One-piece grille allow easy removal/installation for preventative maintenance
- Four (4) heavy duty epoxy coated wire shelves standard
- 6" Casters standard with (2) brakes



#### OPTIONS & ACCESSORIES


- Epoxy shelves
- Door locks
- Shelf clips
- 3" Casters or 6" legs
- Remote option\* (see note on back page)

#### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures of 0° F and below




PLAN VIEW

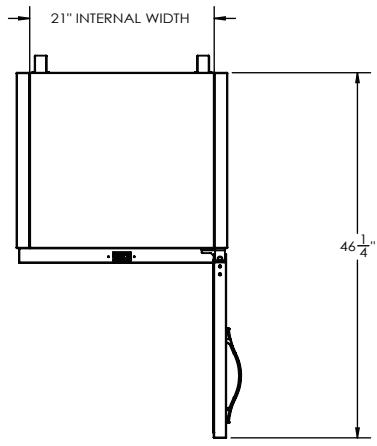

ELEVATION VIEW

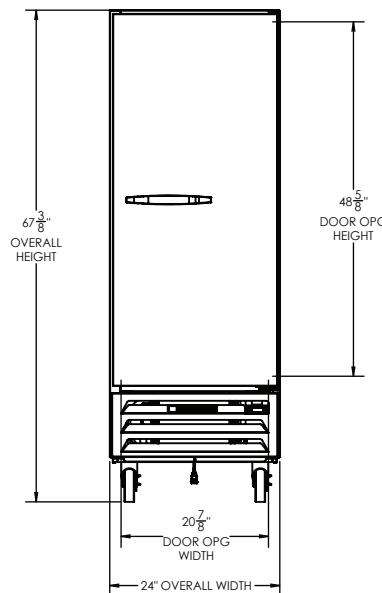

SIDE VIEW

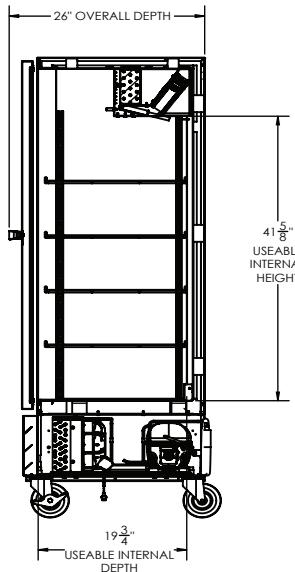

#### EXTERNAL DIMENSIONAL DATA

Width Overall (in)	24"
Depth Overall (in)	26"
Height Overall (in)	67 3/8"
Number of Doors	1
Depth with Door open 90° (in)	46 1/4"
Door Openings (in)	20 7/8" x 48 5/8"
<b>INTERNAL DIMENSIONAL DATA</b>	
NET Capacity (cubic ft.)	11.9
Internal Width Useable (in)	21"
Internal Depth Overall (in)	19 3/4"
Internal Height Overall (in)	41 5/8"
Number of Shelves	4

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

#### ELECTRICAL DATA

Full Load Amps	5.0
Voltage	115/60/1
Nema Plug (8' cord)	5-15P
<b>REFRIGERATION DATA</b>	
Horsepower	1/2
Capacity (BTU/Hr)	1513
Heat Rejection (BTU/Hr)	2269.5
Charge (lbs/grams/ounces)	0.1125 / 51 / 1.80
<b>SHIPPING DATA</b>	
Gross Weight - Crated	218 lbs.
Height - Crated (in)	68"
Width - Crated (in)	27"
Depth - Crated (in)	28"

#### ELECTRICAL CONNECTION



115/60/1  
5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.