



**J & R MANUFACTURING**  
 820 W. KEARNEY, MESQUITE, TX 75149  
 972-285-4855 | 800-527-4831  
[www.jrmanufacturing.com](http://www.jrmanufacturing.com)

# WOOD SHOW™ GRILL

**THE WORLD'S FINEST COMMERCIAL  
SMOKERS, GRILLS, AND ROTISSERIES**



## PRODUCT DESCRIPTION

Our famed grill gets its name from the “show” it creates in fine restaurants all around the world. As you know, the food cooked over a live-fuel fire is unparalleled in flavor. If the Wood Show is in customer view, appetites – and check averages – soar! The Wood Show is legendary for durability, ease of use, and its ability to easily tame the nonpareil intense flame temperatures produced by hardwood fuels. The expert chef is provided the unique ability to control the distance between fuel and food for Santa Maria-style barbecue as well as perfect grilling on all types of cuisine. All-gas models are also available. We customize our Show grills in just about every way imaginable.



## FEATURES & BENEFITS



### LOADING IN FUEL IS EASY

Thanks to the front fuel loading door and the ability to raise the grill above the top of the firebox body.



### ADJUSTABLE COOKING SURFACE

With a simple turn of the wheel it adjusts the grill to position the food closer or farther from the fire for total control of the cooking rate. Because the chef can lower the grill at the end of a shift to utilize every last ember of wood or charcoal, fuel efficiency is maximized. There are fewer interruptions during busy periods to add or tend fuel.



### SAFE, COOL OPERATION

Our unique Chef Cool design keeps the heat inside the grill resulting in a cooler kitchen and a grateful chef.



### EASY TO CLEAN

Due to firebox surfaces that are smooth and an ash drop in the firebox floor that facilitates ash transfer to the removable ash drawer, cleaning is simple.



### HEAVY DUTY CASTERS

Easy mobility is enabled.



### RUGGED

They are built like tanks to take the daily abuse in busiest of kitchens.

### INCLUDED OPTIONS AVAILABLE:

Location of adjusting wheel, epoxy coating color: black or red.

### OPTIONAL AND EXTRA:

Landing shelf, stainless steel back and side splashes, basting pan cutouts, deletion of adjusting wheel, etc.

Custom colors are also available.

We will customize your Wood Show to the size and configuration that perfectly meets your needs.

All-gas models are also available.




**J & R MANUFACTURING**  
 820 W. KEARNEY, MESQUITE, TX 75149  
 972-285-4855 | 800-527-4831  
[www.jrmanufacturing.com](http://www.jrmanufacturing.com)

# WOOD SHOW GRILL™



**CUSTOM SIZES AND CONFIGURATIONS ARE AVAILABLE.  
 WRITE US AT [INFO@JRMANUFACTURING.COM](mailto:INFO@JRMANUFACTURING.COM) TO SET  
 UP A FREE CONSULTATION.**

MODEL	MEASUREMENTS				GRILL BROILING AREA	CAPACITY		
	WIDTH	DEPTH	HEIGHT	SHIP. WT.		12 OZ STEAKS	HALF CHICKENS	4 OZ BURGERS
801-3	36"	34"	73.25"	1150 LBS.	24" X 24"	16	12	36
801-4	48"	34"	73.25"	1350 LBS.	24" X 36"	24	18	54
801-5	60"	34"	73.25"	1600 LBS.	24" X 48"	32	24	72
801-6	72"	34"	73.25"	1850 LBS.	24" X 60"	40	30	90

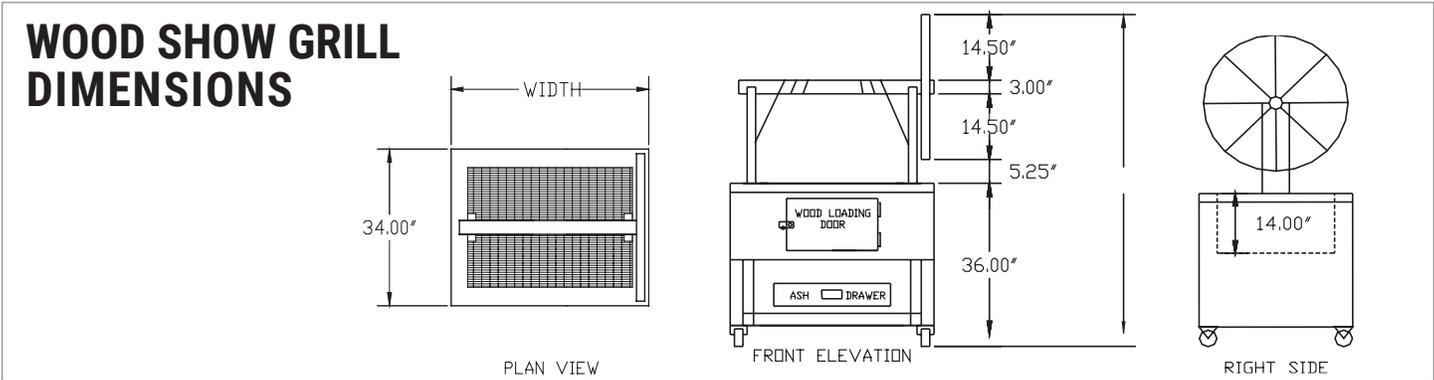

## CONSTRUCTION

Heavy duty all-structural steel-welded framing with 14-gauge stainless steel interior. Exterior is 14-gauge epoxy-coated steel treadplate. The firebox features Chef Cool construction consisting of two layers of steel, two inches of 2500-degree cast refractory, and two inches of high-temperature insulation. The top cap, stanchions, wheel, and shaft are stainless steel with thicknesses ranging from 14-gauge to 1/2 inch. The fuel loading door is insulated and hinged. The casters are heavy duty and include two brakes. The lift/lower cable is stainless steel aircraft cable, 1/4 inch diameter, and rated at 6400 pounds. The removable grates are gray cast iron, nominal 6-inch by 24-inch, and weigh 18 pounds each.

### NOTES:

1. Install on a non-combustible floor.
2. Clearance from combustible walls: front: 48"; back and sides with upper enclosure: 2"; back and sides with no upper enclosure: 48".  
From non-combustible walls: front 48"; back and sides: 0".
3. Ventilation must be done in compliance with NFPA 96 and any local codes (hood and fire suppression by others).
4. Adequate combustion air must be supplied.
5. Fuel: wood or charcoal.
6. See Owner's Manual for additional information.