REGENCY



# Regency Deck-Mounted Faucet with 4" Centers and 3 1/2" Swivel Gooseneck Spout

#600FD44G



#### Features

- 3 1/2" long gooseneck spout, 2 GPM flow rate
- 4" adjustable centers, 1/2" NPS inlets
- Temperature rating 40 140 degrees Fahrenheit
- Chrome-plated brass construction
- Leak-resistant quarter-turn ceramic cartridges with check valves

#### Certifications








### **Technical Data**

Spout Length	3 1/2 Inches
Faucet Height	7 15/16 Inches
Cartridge Type	Ceramic
Faucet Centers	4 Inches
Features	NSF/ANSI 372 NSF/ANSI 61
Finish	Chrome
Flow Rate	2 GPM
Handle Type	Lever
Material	Brass

## **Technical Data**

Mounting StyleDeck MountedMounting TypeWorkboardRough In4 InchesSpout Clearance31/8 InchesSpout TypeGooseneckSprayerWithout SprayerTemperature Rating140 Degrees FTypeSpid 4*:27 UNSTypeFaucetsMuter Inite Size1/2 Inches		
Rough In 4 Inches   Spout Clearance 3 1/8 Inches   Spout Type Gooseneck   Sprayer Without Sprayer   Temperature Rating 140 Degrees F   Thread Size 55/64**27 UNS   Type Faucets	Mounting Style	Deck Mounted
Spout Clearance 31/8 Inches   Spout Type Gooseneck   Sprayer Without Sprayer   Temperature Rating 140 Degrees F   Thread Size 55/64*-27 UNS   Type Faucets	Mounting Type	Workboard
Spout Type Gooseneck   Sprayer Without Sprayer   Temperature Rating 140 Degrees F   Thread Size 55/64*-27 UNS   Type Faucets	Rough In	4 Inches
Sprayer Without Sprayer   Temperature Rating 140 Degrees F   Thread Size 55/64**27 UNS   Type Faucets	Spout Clearance	3 1/8 Inches
Temperature Rating 140 Degrees F   Thread Size 55/64*27 UNS   Type Faucets	Spout Type	Gooseneck
Thread Size 55/64**27 UNS   Type Faucets	Sprayer	Without Sprayer
Type Faucets	Temperature Rating	140 Degrees F
	Thread Size	55/64"-27 UNS
Water Inlet Size 1/2 Inches	Туре	Faucets
	Water Inlet Size	1/2 Inches

### **Plan View**

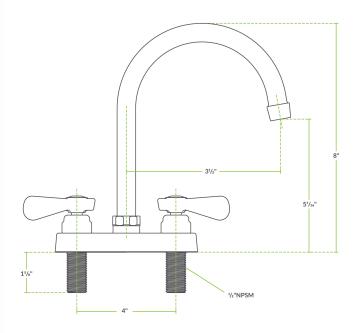

# Notes & Details

Perfect for busy commercial kitchens, this Regency deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Regency faucets provide the industry-leading quality you expect. With a chrome-plated brass faucet body and ceramic cartridges engineered for durability, you can install this model with confidence. This faucet features a 3 1/2" long swivel gooseneck spout that provides a sleek look with plenty of clearance, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 4" adjustable centers, while the deck-mounted design is easy to install with 1/2" male NPS inlets.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.