




SLM-ST SINGLE LAMP STREAMLINE FREESTANDING UNITS



+1(818)767-3501

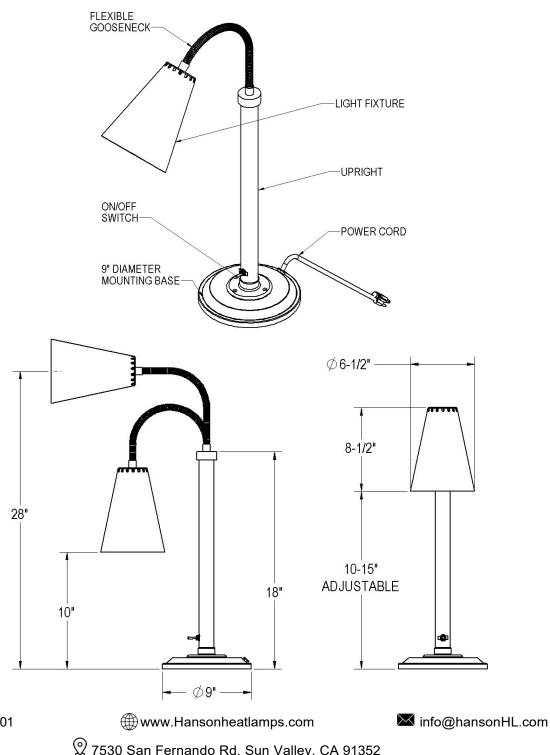



SLM-ST

SINGLE LAMP STREAMLINE FREE STANDING UNITS

Description: Single freestanding streamlined style heat lamps. Available in (6) distinct lamp shades and in (6) unique finishes. Mounted on a round 9" diameter base. Lamps are made from Stainless Steel, Aluminum and Brass. All finishes are non-tarnishing, require no polishing and are easy to clean. All internal components including lamp sockets and wiring are high temperature rated (392°F/200°C).

Standard Models			
Model Number	Description		
SLM-ST	Single lamp stre	eamline style fixture warmer	
Available Finishes: Black, Stainless Steel, Chrome, Smoked Copper, Brass, Bright Copper			
Shade Styles			
200	300	500 600 700 900	
5-1/2" X 7-1/2" Diameter X Length 140 mm X 191 mm	7-1/8" X 7-1/2" Diameter X Length 181 mm X 191 mm	7-1/4" X 7-3/8" 6-1/2" X 8" 7" X 8" 6-1/2" X 8-1/2" Diameter X Diameter X Diameter X Length Length Length Length 184 mm X 165 mm X 178 mm X 187 mm 203 mm 203 mm 216 mm	
Specifications			
Mechanical			
Light head material		Aluminum	
Light head		Varies depending on lamp shade chosen	
Light head height from mounting surface		Adjustable 10-15"	
Upright and all fittings		Stainless Steel	
Base Size		Weighted 9" diameter metal base	
Shipping weight		10 lbs.	
Internal wiring		18 gauge Silver stranded with Teflon insulation.	
		Rated (200° C)	
Lamp socket		Glazed porcelain/nickel. Rated (200° C)	
Switches		On/Off rated 15 amps @ 115 VAC	





SLM-ST

Power cord	120 VAC-18 gauge 3 conductor cable 84" long with
1 OWEI GOIG	Nema 5-15P plug (standard)
	240 VAC-18 gauge 3 conductor harmonized cable
	84" long with Schuko plug (standard).
Electrical	
Operating Voltage (Domestic)	120 volts 60 Hertz single phase
Operating Voltage (International)	240 volts 50 Hertz single phase
Power	250 watts Maximum, shatterproof design.
Operating amperage	2.5 amps (120 VAC) 1.25 amps (240 VAC)
Bulb type	Infrared 250 watts maximum, shatterproof design