{58.40}

TableWorx®
Premium Stainless Steel Tables

Metro TableWorx® premium stainless steel tables are built to last with heavy-duty welded construction and soft-touch edges for the premium feel you'd expect from Metro®. TableWorx® offers the highest level of material options to support any application. **Choose from 3 levels of performance:** Standard (304 stainless work surface with Metroseal Gray components), All-stainless (304 stainless work surface and components), or All-stainless (316 stainless work surface with 304 stainless components). Plus, assembled working height adjustability is built in to ensure the best ergonomics possible.

Features and Benefits:

- Six adjustable working heights built into every table.
- **Multiple base options:** solid or wire shelves, I-frame for 2-sided seating, or 3-sided frame (open base) for nesting carts, trash cans, or equipment.
- Available in mobile or stationary (multiple caster options to meet application needs).
- Easily add stackable drawers or removable easy-clean hanging storage bins.
- Overhead shelves, grids, bins, lights and many other productivity solutions can be added anytime during the life of the work table, converting it into a highly-efficient work center.



TableWorx All-Stainless Table
Shown with solid stainless bottom shelf

LEVEL 1
Standard
304 Stainless Work Surface
Perfect for foodservice, academic, and general use purposes

LEVEL 2
All Stainless
304 Stainless Work Surface
Perfect for lab, electronics, pharmaceutical, and general life science applications

LEVEL 3
All Stainless
316 Stainless Work Surface
Perfect for cleanroom, biopharma, and other applications with demanding cleaning protocols

Component	Standard	304 All Stainless	316 All Stainless*
Work Surface Material	304 Stainless	Type 304 Stainless	Type 316 Stainless
Leg & Shelf Material	Metroseal Gray Epoxy Coated Steel	Type 304 Stainless	Type 304 Stainless
Leg Mount Material	Nylon	Type 304 Stainless	Type 304 Stainless

* 316 All stainless tables have a Type 316 stainless worksurface with Type 304 stainless steel legs, shelves, and leg mounts.



All tables available in stationary or mobile-ready options.

MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban® Products Company, Huntersville, NC. Microban® product protection does not by itself protect a user from food borne illness. Product must be routinely cleaned.

Warranty: 1-year parts & labor warranty

All Metro Catalog Sheets are available on our website: **metro.com**

LO2-260 | 1/26

Information and specifications are subject to change without notice.
Please confirm at time of order.
Copyright © 2026 InterMetro Industries Corp.

metro.com
North Washington Street, Wilkes-Barre, PA 18705
Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: metro.com/contactus

Work surface Specifications

- Surface consists of 16-gauge stainless steel with a #4 finish.
- Reinforced with 16-gauge hat channels.
- Unique/proprietary fastening technology provides exceptional rigidity, strength, and sound deadening.
- Work surface alloy: type 304 or 316 stainless.
- Lengths 60" and under (1524 mm).
  Surface load rating is 750 lbs. (340 kg) evenly distributed.
- Lengths over 60" (1524 mm).
  Surface load rating is 650 lbs. (295 kg) evenly distributed.
- Work surface features 90-degree turned down edges with radii on all four sides.
- All sizes available with an optional 2" (51 mm) backsplash formed into the stainless work surface.




Available with optional back splash.

Available Sizes


Widths	Lengths						
	24" (610 mm)	30" (762 mm)	36" (914 mm)	48" (1219 mm)	60" (1524 mm)	72" (1829 mm)	96" (2438 mm)
30" (762 mm)	-	X	X	X	X	X	X
24" (610 mm)	X	X	X	X	X	X	X
36" (914 mm)	-	-	X	X	X	X	X

Work Surface Height Adjustability

- Ergonomics: Perfect seated height or standing height in EVERY TableWorx solution.
- Out of the box TableWorx can be assembled to any one of six working surface heights: 34" (864 mm), 35" (889 mm), 36" (914 mm), 37" (940 mm), 38" (965 mm), and 39" (991 mm).
- Work surface heights are the same across both stationary and mobile solutions (assuming use of 5" stems casters).




6 ADJUSTABLE
Working Heights
34"—39"
(864mm – 991mm)

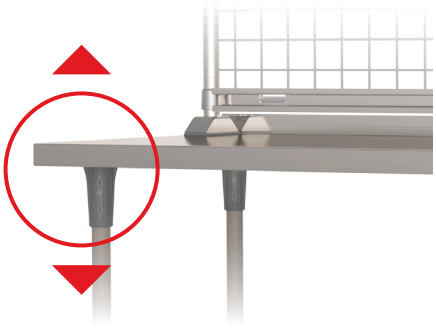


Under Structure


- Available solutions:
  - > *Solid stainless undershelf*
  - > *Three-sided frame*
  - > *I-frame (H-frame)*
- All-welded, all-stainless steel construction.
- Underframe material: Type 304 stainless steel.
- Understructures can be assembled to varying heights to table legs in 2" (51 mm) increments.
- Multiple shelves of any type can be installed to increase available storage underneath.
- Multiple frames and/or shelves can be installed to increase work table rigidity.




Solid Stainless Bottom Shelf
Base accommodates multiple shelves



3-Sided Frame
To nest equipment or when seated



"I" Frame
Perfect for foot rest or 2-sided access




Metroseal Gray Wire Bottom Shelf*
Base accommodates multiple shelves

* Metroseal wire shelves available in select sizes only.

Table Legs

- Leg Material: 16-gauge type 304 stainless steel or Metroseal Gray epoxy-coated 16-gauge cold-rolled steel.
- Metroseal Gray epoxy finish has built-in Microban® antimicrobial protection. 12-Year corrosion warranty.
- Leg Mount Material: Type 304 stainless steel or reinforced nylon polymer.
- Legs: Outer Diameter: 1-5/8" (41 mm) Lengths: 32" (813 mm) stationary and 27" (686 mm) for mobile.
- Mobile-ready legs can accept any Metro 1" (25 mm) stem caster.
- Mobile legs are designed to accept total locking casters for maximum rigidity on mobile solutions.
- Stationary legs include stainless leveling bullet feet with 1-1/8" (29 mm) range of adjustability.

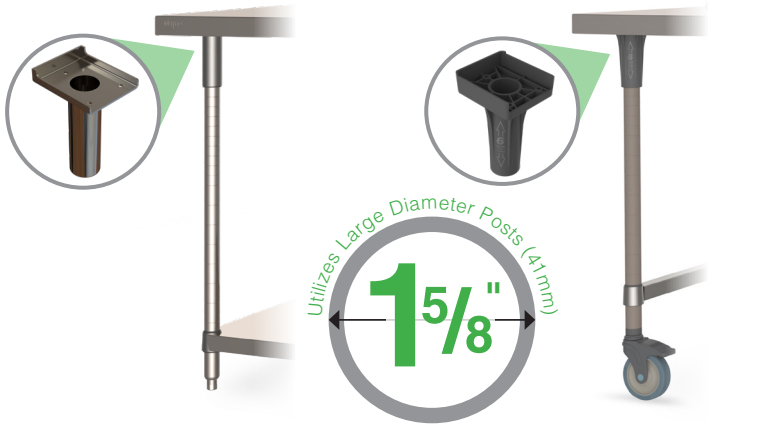

304 Stainless Steel Post
Shown in stationary with stainless steel leg mount

Metroseal Epoxy Coated Post
Shown in mobile with polymer leg mount


Caster Options Based on Performance Level

STANDARD SERIES	• BEST ALL AROUND • ALL STAINLESS & 316 STAINLESS SERIES
	
5PCB-NB	**5PSTEB-NB**
Standard Polymer Caster Basic corrosion protection for wet environments. Reinforced nylon rig with chromate plated stem and swivel raceway. **Maintenance Free:** Sealed swivel ball bearings and Delrin axle bearings. **Basic corrosion resistance**	**Polymer/Stainless Total-Guard Caster** High-rust protection with reinforced nylon rig, stainless steel stem and hardware. Non-marking polyurethane flat tread & polyethylene hub. **Excellent chemical & corrosion resistance.** **Best for: high-humidity, high salt exposure, frequent and caustic cleaning regimens.**

Cat. No.	Wheel Diameter (in.)	Wheel Diameter (mm)	Face (in.)	Face (mm)	Load Rating (lbs.)	Load Rating (kg)	Type	Wheel Tread	Temperature range (continuous) (Fahrenheit)	Temperature range (continuous) (Celsius)
5PSTEB-NB	5	127	1.25	32	250	113	Stem/Brake	TPE, Flat	-20° - 120°	-29° - 49°
5MDBGSA	5	127	1.25	32	250	113	Stem/Brake	High Modulus Donut	-20° - 120°	-29° - 49°
5MPBGSA	5	127	1.25	32	250	113	Stem/Brake	Polyurethane, Flat	-20° - 120°	-29° - 49°

TableWorx accepts any Metro 1" stem caster available. Selected caster solution comes with four brake casters

Dimensional Specifications

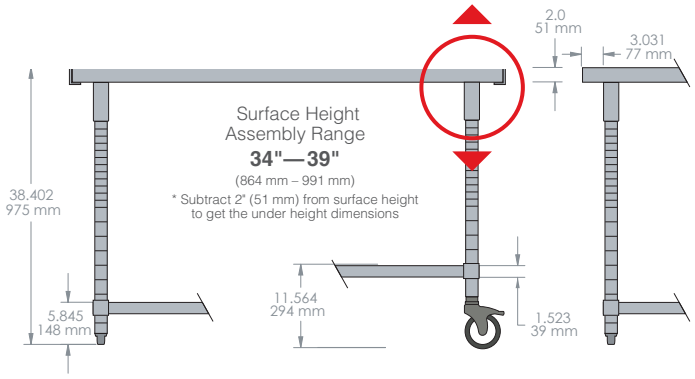

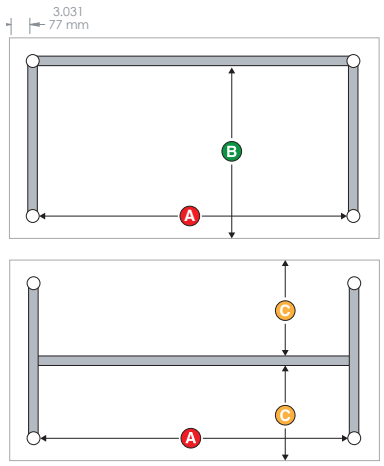


Table Top Size (in.)	Table Top Size (mm)	A (in.)	A (mm)	B (in.)	B (mm)	C (in.)	C (mm)
24x24	610x610	13.7	348	20.2	513	11.3	287
24x30	610x762	19.7	500	20.2	513	11.3	287
24x36	610x914	25.7	653	20.2	513	11.3	287
24x48	610x1219	37.7	958	20.2	513	11.3	287
24x60	610x1524	49.7	1262	20.2	513	11.3	287
24x72	610x829	61.7	1567	20.2	513	11.3	287
24x96	610x2438	85.7	2177	20.2	513	11.3	287
30x30	762x762	19.7	500	24.2	615	14.3	363
30x36	762x914	25.7	653	24.2	615	14.3	363
30x48	762x1219	37.7	958	24.2	615	14.3	363
30x60	762x1524	49.7	1262	24.2	615	14.3	363
30x72	762x829	61.7	1567	24.2	615	14.3	363
30x96	762x2438	85.7	2177	24.2	615	14.3	363
36x36	914x914	25.7	653	30.2	767	17.25	438
36x48	914x1219	37.7	958	30.2	767	17.25	438
36x60	914x1524	49.7	1262	30.2	767	17.25	438
36x72	914x829	61.7	1567	30.2	767	17.25	438
36x96	914x2438	85.7	2177	30.2	767	17.25	438

Table Width
24"
30"
36"

Under Structure
FS = Solid Stainless Shelf
SU = Stainless 3-Sided Frame
SI = Stainless I-Frame (H-Frame)

Post & Collar Finish
S = All-Stainless Posts & Collars
K = Metroseal Gray Epoxy-Coated Posts & Polymer Collars

TW M 3060 FS - 304B - S 01

S = Stationary
M = Mobile

Surface Material
304 = Type 304 Alloy Polished
316 = Type 316 Alloy Polished
304B = Type 304 w/ 2" Backsplash
316B = Type 316 w/ 2" Backsplash

Table Length
24" 60"
30" 72"
36" 96"
48"

Caster
01 = 5PCB-NB
02 = 5PSTEB-NB



LEVEL 1

304 Stainless Work Surface Tables



STATIONARY Standard

Metroseal Epoxy Coated Posts and Polymer Post Mounts

Table Width	Table Length (in.)	Table Length (mm)	Shelf Solid Stainless Cat. No.	Wire Shelf Metroseal Gray Cat. No.	3-Sided Frame Stainless Cat. No.	I-Frame Stainless Cat. No.
24" (610 mm)	24	610	TWS2424FS-304-K	–	TWS2424SU-304-K	TWS2424SI-304-K
	30	762	TWS2430FS-304-K	–	TWS2430SU-304-K	TWS2430SI-304-K
	36	914	TWS2436FS-304-K	–	TWS2436SU-304-K	TWS2436SI-304-K
	48	1219	TWS2448FS-304-K	–	TWS2448SU-304-K	TWS2448SI-304-K
	60	1524	TWS2460FS-304-K	–	TWS2460SU-304-K	TWS2460SI-304-K
	72	1829	TWS2472FS-304-K	–	TWS2472SU-304-K	TWS2472SI-304-K
	96	2438	TWS2496FS-304-K	–	TWS2496SU-304-K	TWS2496SI-304-K
30" (762 mm)	30	762	TWS3030FS-304-K	–	TWS3030SU-304-K	TWS3030SI-304-K
	36	914	TWS3036FS-304-K	–	TWS3036SU-304-K	TWS3036SI-304-K
	48	1219	TWS3048FS-304-K	TWS3048FS-304-K	TWS3048SU-304-K	TWS3048SI-304-K
	60	1524	TWS3060FS-304-K	TWS3060FS-304-K	TWS3060SU-304-K	TWS3060SI-304-K
	72	1829	TWS3072FS-304-K	TWS3072FS-304-K	TWS3072SU-304-K	TWS3072SI-304-K
	96	2438	TWS3096FS-304-K	–	TWS3096SU-304-K	TWS3096SI-304-K
36" (914 mm)	36	914	TWS3636FS-304-K	–	TWS3636SU-304-K	TWS3636SI-304-K
	48	1219	TWS3648FS-304-K	TWS3648FS-304-K	TWS3648SU-304-K	TWS3648SI-304-K
	60	1524	TWS3660FS-304-K	TWS3660FS-304-K	TWS3660SU-304-K	TWS3660SI-304-K
	72	1829	TWS3672FS-304-K	TWS3672FS-304-K	TWS3672SU-304-K	TWS3672SI-304-K
	96	2438	TWS3696FS-304-K	–	TWS3696SU-304-K	TWS3696SI-304-K

Note: For optional 2" backsplash, add **"B"** suffix to surface material designation. Ex: TWS3648FS-304**B**-K



MOBILE Standard

(with Four 5PCB-NB Brake Casters)

Metroseal Epoxy-Coated Posts and Polymer Post Mounts

Table Width	Table Length (in.)	Table Length (mm)	Shelf Solid Stainless Cat. No.	Wire Shelf Metroseal Gray Cat. No.	3-Sided Frame Stainless Cat. No.	I-Frame Stainless Cat. No.
24" (610 mm)	24	610	TWM2424FS-304-K02	–	TWM2424SU-304-K02	TWM2424SI-304-K02
	30	762	TWM2430FS-304-K02	–	TWM2430SU-304-K02	TWM2430SI-304-K02
	36	914	TWM2436FS-304-K02	–	TWM2436SU-304-K02	TWM2436SI-304-K02
	48	1219	TWM2448FS-304-K02	–	TWM2448SU-304-K02	TWM2448SI-304-K02
	60	1524	TWM2460FS-304-K02	–	TWM2460SU-304-K02	TWM2460SI-304-K02
	72	1829	TWM2472FS-304-K02	–	TWM2472SU-304-K02	TWM2472SI-304-K02
	96	2438	TWM2496FS-304-K02	–	TWM2496SU-304-K02	TWM2496SI-304-K02
30" (762 mm)	30	762	TWM3030FS-304-K02	–	TWM3030SU-304-K02	TWM3030SI-304-K02
	36	914	TWM3036FS-304-K02	–	TWM3036SU-304-K02	TWM3036SI-304-K02
	48	1219	TWM3048FS-304-K02	TWM3048K4-304-K03	TWM3048SU-304-K02	TWM3048SI-304-K02
	60	1524	TWM3060FS-304-K02	TWM3060K4-304-K03	TWM3060SU-304-K02	TWM3060SI-304-K02
	72	1829	TWM3072FS-304-K02	TWM3072K4-304-K03	TWM3072SU-304-K02	TWM3072SI-304-K02
	96	2438	TWM3096FS-304-K02	–	TWM3096SU-304-K02	TWM3096SI-304-K02
36" (914 mm)	36	914	TWM3636FS-304-K02	–	TWM3636SU-304-K02	TWM3636SI-304-K02
	48	1219	TWM3648FS-304-K02	TWM3648K4-304-K03	TWM3648SU-304-K02	TWM3648SI-304-K02
	60	1524	TWM3660FS-304-K02	TWM3660K4-304-K03	TWM3660SU-304-K02	TWM3660SI-304-K02
	72	1829	TWM3672FS-304-K02	TWM3672K4-304-K03	TWM3672SU-304-K02	TWM3672SI-304-K02
	96	2438	TWM3696FS-304-K02	–	TWM3696SU-304-K02	TWM3696SI-304-K02

Note: For optional 2" backsplash, add **"B"** suffix to surface material designation. Ex: TWS3648FS-304**B**-K

LEVEL 2

304 Stainless Work Surface Tables



STATIONARY 304 All-Stainless

304 Stainless Components

Table Width	Table Length (in.)	Table Length (mm)	Shelf Solid Stainless Cat. No.	3-Sided Frame Stainless Cat. No.	I-Frame Stainless Cat. No.
24" (610 mm)	24	610	TWS2424FS-304-S	TWS2424SU-304-S	TWS2424SI-304-S
	30	762	TWS2430FS-304-S	TWS2430SU-304-S	TWS2430SI-304-S
	36	914	TWS2436FS-304-S	TWS2436SU-304-S	TWS2436SI-304-S
	48	1219	TWS2448FS-304-S	TWS2448SU-304-S	TWS2448SI-304-S
	60	1524	TWS2460FS-304-S	TWS2460SU-304-S	TWS2460SI-304-S
	72	1829	TWS2472FS-304-S	TWS2472SU-304-S	TWS2472SI-304-S
	96	2438	TWS2496FS-304-S	TWS2496SU-304-S	TWS2496SI-304-S
30" (762 mm)	30	762	TWS3030FS-304-S	TWS3030SU-304-S	TWS3030SI-304-S
	36	914	TWS3036FS-304-S	TWS3036SU-304-S	TWS3036SI-304-S
	48	1219	TWS3048FS-304-S	TWS3048SU-304-S	TWS3048SI-304-S
	60	1524	TWS3060FS-304-S	TWS3060SU-304-S	TWS3060SI-304-S
	72	1829	TWS3072FS-304-S	TWS3072SU-304-S	TWS3072SI-304-S
	96	2438	TWS3096FS-304-S	TWS3096SU-304-S	TWS3096SI-304-S
36" (914 mm)	36	914	TWS3636FS-304-S	TWS3636SU-304-S	TWS3636SI-304-S
	48	1219	TWS3648FS-304-S	TWS3648SU-304-S	TWS3648SI-304-S
	60	1524	TWS3660FS-304-S	TWS3660SU-304-S	TWS3660SI-304-S
	72	1829	TWS3672FS-304-S	TWS3672SU-304-S	TWS3672SI-304-S
	96	2438	TWS3696FS-304-S	TWS3696SU-304-S	TWS3696SI-304-S

Note: For optional 2" backsplash, add **"B"** suffix to surface material designation. Ex: TWS3648FS-304**B**-K



MOBILE 304 All-Stainless
(with Four 5PSTEB-NB Brake Casters)

304 Stainless Components

Table Width	Table Length (in.)	Table Length (mm)	Solid Stainless Shelf Cat. No.	Stainless 3-Sided Frame Cat. No.	Stainless I-Frame Cat. No.
24" (610 mm)	24	610	TWM2424FS-304-S01	TWM2424SU-304-S01	TWM2424SI-304-S01
	30	762	TWM2430FS-304-S01	TWM2430SU-304-S01	TWM2430SI-304-S01
	36	914	TWM2436FS-304-S01	TWM2436SU-304-S01	TWM2436SI-304-S01
	48	1219	TWM2448FS-304-S01	TWM2448SU-304-S01	TWM2448SI-304-S01
	60	1524	TWM2460FS-304-S01	TWM2460SU-304-S01	TWM2460SI-304-S01
	72	1829	TWM2472FS-304-S01	TWM2472SU-304-S01	TWM2472SI-304-S01
	96	2438	TWM2496FS-304-S01	TWM2496SU-304-S01	TWM2496SI-304-S01
30" (762 mm)	30	762	TWM3030FS-304-S01	TWM3030SU-304-S01	TWM3030SI-304-S01
	36	914	TWM3036FS-304-S01	TWM3036SU-304-S01	TWM3036SI-304-S01
	48	1219	TWM3048FS-304-S01	TWM3048SU-304-S01	TWM3048SI-304-S01
	60	1524	TWM3060FS-304-S01	TWM3060SU-304-S01	TWM3060SI-304-S01
	72	1829	TWM3072FS-304-S01	TWM3072SU-304-S01	TWM3072SI-304-S01
	96	2438	TWM3096FS-304-S01	TWM3096SU-304-S01	TWM3096SI-304-S01
36" (914 mm)	36	914	TWM3636FS-304-S01	TWM3636SU-304-S01	TWM3636SI-304-S01
	48	1219	TWM3648FS-304-S01	TWM3648SU-304-S01	TWM3648SI-304-S01
	60	1524	TWM3660FS-304-S01	TWM3660SU-304-S01	TWM3660SI-304-S01
	72	1829	TWM3672FS-304-S01	TWM3672SU-304-S01	TWM3672SI-304-S01
	96	2438	TWM3696FS-304-S01	TWM3696SU-304-S01	TWM3696SI-304-S01

Note: For optional 2" backsplash, add **"B"** suffix to surface material designation. Ex: TWS3648FS-304**B**-K

LEVEL 3

316 Stainless Work Surface Tables



STATIONARY 316 All-Stainless

304 Stainless Components

Table Width	Table Length (in.)	Table Length (mm)	Shelf Solid Stainless Cat. No.	3-Sided Frame Stainless Cat. No.	I-Frame Stainless Cat. No.
24" (610 mm)	24	610	TWS2424FS-316-S	TWS2424SU-316-S	TWS2424SI-316-S
	30	762	TWS2430FS-316-S	TWS2430SU-316-S	TWS2430SI-316-S
	36	914	TWS2436FS-316-S	TWS2436SU-316-S	TWS2436SI-316-S
	48	1219	TWS2448FS-316-S	TWS2448SU-316-S	TWS2448SI-316-S
	60	1524	TWS2460FS-316-S	TWS2460SU-316-S	TWS2460SI-316-S
	72	1829	TWS2472FS-316-S	TWS2472SU-316-S	TWS2472SI-316-S
	96	2438	TWS2496FS-316-S	TWS2496SU-316-S	TWS2496SI-316-S
30" (762 mm)	30	762	TWS3030FS-316-S	TWS3030SU-316-S	TWS3030SI-316-S
	36	914	TWS3036FS-316-S	TWS3036SU-316-S	TWS3036SI-316-S
	48	1219	TWS3048FS-316-S	TWS3048SU-316-S	TWS3048SI-316-S
	60	1524	TWS3060FS-316-S	TWS3060SU-316-S	TWS3060SI-316-S
	72	1829	TWS3072FS-316-S	TWS3072SU-316-S	TWS3072SI-316-S
	96	2438	TWS3096FS-316-S	TWS3096SU-316-S	TWS3096SI-316-S
36" (914 mm)	36	914	TWS3636FS-316-S	TWS3636SU-316-S	TWS3636SI-316-S
	48	1219	TWS3648FS-316-S	TWS3648SU-316-S	TWS3648SI-316-S
	60	1524	TWS3660FS-316-S	TWS3660SU-316-S	TWS3660SI-316-S
	72	1829	TWS3672FS-316-S	TWS3672SU-316-S	TWS3672SI-316-S
	96	2438	TWS3696FS-316-S	TWS3696SU-316-S	TWS3696SI-316-S

Note: For optional 2" backsplash, add **"B"** suffix to surface material designation. Ex: TWS3648FS-304**B**-K



MOBILE 316 All-Stainless

(with Four 5PSTEB-NB Brake Casters)

304 Stainless Components

Table Width	Table Length (in.)	Table Length (mm)	Solid Stainless Shelf Cat. No.	Stainless 3-Sided Frame Cat. No.	Stainless I-Frame Cat. No.
24" (610 mm)	24	610	TWM2424FS-316-S01	TWM2424SU-316-S01	TWM2424SI-316-S01
	30	762	TWM2430FS-316-S01	TWM2430SU-316-S01	TWM2430SI-316-S01
	36	914	TWM2436FS-316-S01	TWM2436SU-316-S01	TWM2436SI-316-S01
	48	1219	TWM2448FS-316-S01	TWM2448SU-316-S01	TWM2448SI-316-S01
	60	1524	TWM2460FS-316-S01	TWM2460SU-316-S01	TWM2460SI-316-S01
	72	1829	TWM2472FS-316-S01	TWM2472SU-316-S01	TWM2472SI-316-S01
	96	2438	TWM2496FS-316-S01	TWM2496SU-316-S01	TWM2496SI-316-S01
30" (762 mm)	30	762	TWM3030FS-316-S01	TWM3030SU-316-S01	TWM3030SI-316-S01
	36	914	TWM3036FS-316-S01	TWM3036SU-316-S01	TWM3036SI-316-S01
	48	1219	TWM3048FS-316-S01	TWM3048SU-316-S01	TWM3048SI-316-S01
	60	1524	TWM3060FS-316-S01	TWM3060SU-316-S01	TWM3060SI-316-S01
	72	1829	TWM3072FS-316-S01	TWM3072SU-316-S01	TWM3072SI-316-S01
	96	2438	TWM3096FS-316-S01	TWM3096SU-316-S01	TWM3096SI-316-S01
36" (914 mm)	36	914	TWM3636FS-316-S01	TWM3636SU-316-S01	TWM3636SI-316-S01
	48	1219	TWM3648FS-316-S01	TWM3648SU-316-S01	TWM3648SI-316-S01
	60	1524	TWM3660FS-316-S01	TWM3660SU-316-S01	TWM3660SI-316-S01
	72	1829	TWM3672FS-316-S01	TWM3672SU-316-S01	TWM3672SI-316-S01
	96	2438	TWM3696FS-316-S01	TWM3696SU-316-S01	TWM3696SI-316-S01

Note: For optional 2" backsplash, add **"B"** suffix to surface material designation. Ex: TWS3648FS-304**B**-K

Stainless Steel Drawers

- Fully fabricated 304 stainless steel *no-flex* construction *(No pan drop-in required).*
- **Dimensions:**
  Exterior 19.5"D (495 mm) x 20.5"W (521 mm) x 7"H (178 mm)
  Interior 18"D (457 mm) x 18.75"W (476 mm) x 5.5"H (140 mm)
- Fully removable drawer with 35 lbs. load capacity per drawer.
- Stackable up to 3 high.
- Drawer face remains flush with work surface edge regardless of the table depth.
- Multiple mounting locations: Right, Center, Left *(Depending on table length)*; **Drawers can be both front-facing and rear-facing** if mounted on the same table.*

*Note: Cannot be mounted back to back.

Drawer Stack




Primary Drawer

Fits Table Depth (in.)	Fits Table Depth (mm)	Drawer Cat. No.
24	610	**TWDR6-24**
30	762	**TWDR6-30**
36	914	**TWDR6-36**


Add-A-Drawer

Table Length (in.)	Table Length (mm)	Solid Stainless Shelf Cat. No.
ALL		**TWDR6-ADD**


Drawer Locations

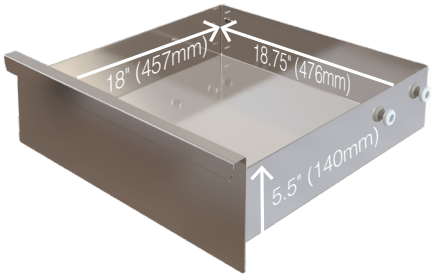


36"
Allows 1 drawer stack in one location only.



48"
Allows 1 drawer stack in right, center or left.

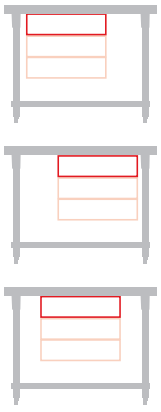

60" / 72"
Allows 2 drawer stacks right and left or one drawer stack in center.




96"
Allows 3 drawer stacks right, left and center.



Shown on a 30" x 60" table with (2) drawer locations.

Bin Hangers


- Fixture that allows attachment of any Metro bin to the underside of the table.
- Alternative to a drawer.
- Bins are easily removeable for cleaning.
- Mounts, configures, and takes up the same footprint as the drawer above.
- Two MB30235CLSH will fill out each TW-BINHANG solution, but any Metro hanging bin can attach.

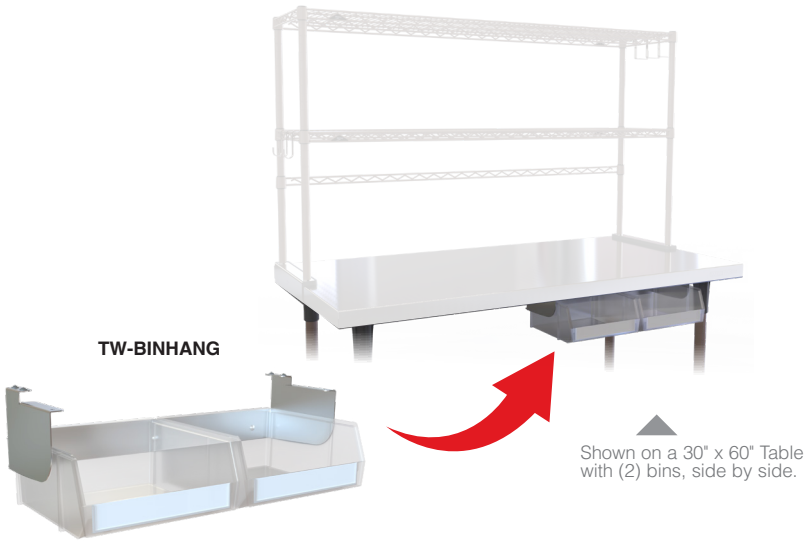


Shown on a 30" x 60" Table with (2) bins, side by side.

Bin Locations


36"
Allows (1) 2-bin hanger




48"
Allows (1) 2-bin hanger

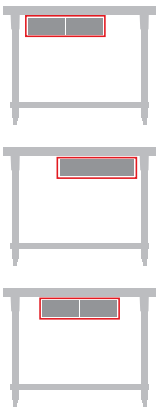

60" / 72"
Allows up to (2) 2-bin hanger



96"
Allows up to (3) 2-bin hanger





MB30235CLSH

ESD Solutions

- Can easily be converted to an ESD solution to allow conductivity from the surface to the floor.
- ESDTWS-KIT: converts stationary configurations to ESD solutions.
- ESDTWS-KIT: converts mobile configurations to ESD solutions.
- The mobile conversion kit must be purchased in conjunction with ESD casters as well.

ESD SAFE

Table Tops

16 gauge type 304 or 316 stainless steel with #4 finish. Available with optional 2" (51 mm) backsplash formed in.

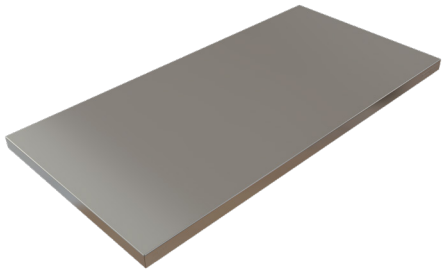


Table Top Size (in.)	Table Top Size (mm)	304 Table Top Cat. No.	304 Table Top with backsplash Cat. No.	316 Table Top Cat. No.	316 Table Top with backsplash Cat. No.
24x24	610x610	TW2424-304	TW2424-304B	TW2424-316	TW2424-316B
24x30	610x762	TW2430-304	TW2430-304B	TW2430-316	TW2430-316B
24x36	610x914	TW2436-304	TW2436-304B	TW2436-316	TW2436-316B
24x48	610x1219	TW2448-304	TW2448-304B	TW2448-316	TW2448-316B
24x60	610x1524	TW2460-304	TW2460-304B	TW2460-316	TW2460-316B
24x72	610x1829	TW2472-304	TW2472-304B	TW2472-316	TW2472-316B
24x96	610x2438	TW2496-304	TW2496-304B	TW2496-316	TW2496-316B
30x30	762x762	TW3030-304	TW3030-304B	TW3030-316	TW3030-316B
30x36	762x914	TW3036-304	TW3036-304B	TW3036-316	TW3036-316B
30x48	762x1219	TW3048-304	TW3048-304B	TW3048-316	TW3048-316B
30x60	762x1524	TW3060-304	TW3060-304B	TW3060-316	TW3060-316B
30x72	762x1829	TW3072-304	TW3072-304B	TW3072-316	TW3072-316B
30x96	762x2438	TW3096-304	TW3096-304B	TW3096-316	TW3096-316B
36x36	914x914	TW3636-304	TW3636-304B	TW3636-316	TW3636-316B
36x48	914x1219	TW3648-304	TW3648-304B	TW3648-316	TW3648-316B
36x60	914x1524	TW3660-304	TW3660-304B	TW3660-316	TW3660-316B
36x72	914x1829	TW3672-304	TW3672-304B	TW3672-316	TW3672-316B
36x96	914x2438	TW3696-304	TW3696-304B	TW3696-316	TW3696-316B

Lower Shelves

Choose from all-welded type 304 stainless or Metroseal Gray Wire lower shelves.



Fits Table Size (in.)	Fits Table Size (mm)	Solid Stainless Shelf Cat. No.	Metroseal Gray Wire Shelf Cat. No.
24x24	610x610	TW2018FS	–
24x30	610x762	TW2024FS	–
24x36	610x914	TW2030FS	–
24x48	610x1219	TW2042FS	–
24x60	610x1524	TW2054FS	–
24x72	610x1829	TW2066FS	–
24x96	610x2438	TW2090FS	–
30x30	762x762	TW2424FS	–
30x36	762x914	TW2430FS	–
30x48	762x1219	TW2442FS	TW2442K4
30x60	762x1524	TW2454FS	TW2454K4
30x72	762x1829	TW2466FS	TW2466K4
30x96	762x2438	TW2490FS	–
36x36	914x914	TW3030FS	–
36x48	914x1219	TW3042FS	TW3042K4
36x60	914x1524	TW3054FS	TW3054K4
36x72	914x1829	TW3066FS	TW3066K4
36x96	914x2438	TW3090FS	–

Pre-Configured Riser Options



2 Rear Cantilevered Solid Stainless Shelves



2 Center Cantilevered Solid Stainless Shelves



2 Rear Cantilevered Wire Stainless Shelves

Table Length (in.)	(mm)	TYPE 304 STAINLESS STEEL Cat. No.	TYPE 316 STAINLESS STEEL Cat. No.	TYPE 304 STAINLESS STEEL Cat. No.	TYPE 316 STAINLESS STEEL Cat. No.	TYPE 304 STAINLESS STEEL Cat. No.
36	914	TWR36-2CRS304	TWR36-2CRS316	TWR36-2CCS304	TWR36-2CCS316	TWR36-2DMS
48	1219	TWR48-2CRS304	TWR48-2CRS316	TWR48-2CCS304	TWR48-2CCS316	TWR48-2DMS
60	1524	TWR60-2CRS304	TWR60-2CRS316	TWR60-2CCS304	TWR60-2CCS316	TWR60-2DMS
72	1828	TWR72-2CRS304	TWR72-2CRS316	TWR72-2CCS304	TWR72-2CCS316	TWR72-2DMS
96	2438	TWR96-2CRS304	TWR96-2CRS316	TWR96-2CCS304	TWR96-2CCS316	–



SmartWall Grid Only



SmartWall Grid with Solid Stainless Cantilevered Shelf



SmartWall Grid with Wire Stainless Cantilevered Shelf

Table Length (in.)	(mm)	Cat. No.	TYPE 304 STAINLESS STEEL Cat. No.	Cat. No.	TYPE 304 STAINLESS STEEL Cat. No.	TYPE 304 STAINLESS STEEL Cat. No.
36	914	TWR36-2436GRK4	TWR36-2436GRS	TWR36-GRK4-CRS304	TWR36-GRS-CRS304	TWR36-GRK4-DMS304
48	1219	TWR48-2448GRK4	TWR48-2448GRS	TWR48-GRK4-CRS304	TWR48-GRS-CRS304	TWR48-GRK4-DMS304
60	1524	TWR60-2460GRK4	TWR60-2460GRS	TWR60-GRK4-CRS304	TWR60-GRS-CRS304	TWR60-GRK4-DMS304
72	1828	TWR72-2472GRK4	TWR72-2472GRS	TWR72-GRK4-CRS304	TWR72-GRS-CRS304	TWR72-GRK4-DMS304
96	2438	TWR96-2496GRK4	TWR96-2496GRS	TWR96-GRK4-CRS304	TWR96-GRS-CRS304	–

{58.40}

TableWorx™
Premium Stainless Steel Tables

Understructures

All-welded, 16-gauge type 304 electropolished stainless steel frames.







Fits Table Size (in.)	(mm)	3-Sided Frame Cat. No.	I-Frame Cat. No.
24x24	610x610	**TWTF2018S**	**TWIF2018S**
24x30	610x762	**TWTF2024S**	**TWIF2024S**
24x36	610x914	**TWTF2030S**	**TWIF2030S**
24x48	610x1219	**TWTF2042S**	**TWIF2042S**
24x60	610x1524	**TWTF2064S**	**TWIF2064S**
24x72	610x1829	**TWTF2066S**	**TWIF2066S**
24x96	610x2438	**TWTF2090S**	**TWIF2090S**
30x30	762x762	**TWTF2424S**	**TWIF2424S**
30x36	762x914	**TWTF2430S**	**TWIF2430S**
30x48	762x1219	**TWTF2442S**	**TWIF2442S**
30x60	762x1524	**TWTF2454S**	**TWIF2454S**
30x72	762x1829	**TWTF2466S**	**TWIF2466S**
30x96	762x2438	**TWTF2490S**	**TWIF2490S**
36x36	914x914	**TWTF3030S**	**TWIF3030S**
36x48	914x1219	**TWTF3042S**	**TWIF3042S**
36x60	914x1524	**TWTF3064S**	**TWIF3064S**
36x72	914x1829	**TWTF3066S**	**TWIF3066S**
36x96	914x2438	**TWTF3090S**	**TWIF3090S**

Table Legs





Leg Type	Type 304 Stainless	Metroseal Gray
Mobile	**TWP27S**	**TWP27K4**
Stationary	**TWP32S**	**TWP32K4**

Adjustable-Height Work Surface Leg Mounts



Polymer #
TWAPM-POLY



Stainless #
TWAPM-SST

WELBILT
an AI Group Company