| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

SIDE MOUNT UNDERCOUNTER DRAWER REFRIGERATOR

UCRD93AHC Solid Door Refrigerator With Doors/Drawers Hydrocarbon Series

MODEL: UCRD93AHC-2



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, drawers and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on lift-off hinges
- Magnetic gasket attached to each door for positive seal
- Four (4) epoxy-coated steel wire shelves
- Field-reversible door
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (doors only)
- · Wire shelf divider
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F








3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL | UCRD93AHC-2 | |
|------------------------------------|--------------------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 93 1⁄8" | |
| Depth Overall with Handle & Bumper | 34 ¾" | |
| Height Overall with 6" Casters | 34 ½" | |
| Number of Drawers | 2 | |
| Drawer Openings | 21 %" x 10 %" 21 %" x 10 ¼" | |
| Depth with Drawer Extended | 57 ½" | |
| Number of Doors | 2 | |
| Depth with Door Open 90° | 55 1⁄%" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 29.7 | |
| Internal Width Overall (in) | 89" | |
| Internal Depth Overall (in) | 26" | |
| Internal Height Overall (in) | 25" | |
| Number of Shelves | 4 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 5.0 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/3 | |
| Capacity (BTU/Hr) | 2629 | |
| Heat Rejection (BTU/Hr) | 3943.5 | |
| Charge (lbs/grams/ounces) | 0.3086 / 140 / 4.94 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 496 lbs | |
| Height - Crated | 48" | |
| Width - Crated | 96" | |
| Depth - Crated | 37" | |

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).




c U us W KCIR AQ W





Undercounter Doors/Drawers Refrigerator - Side Mount Model: UCRD93AHC-2

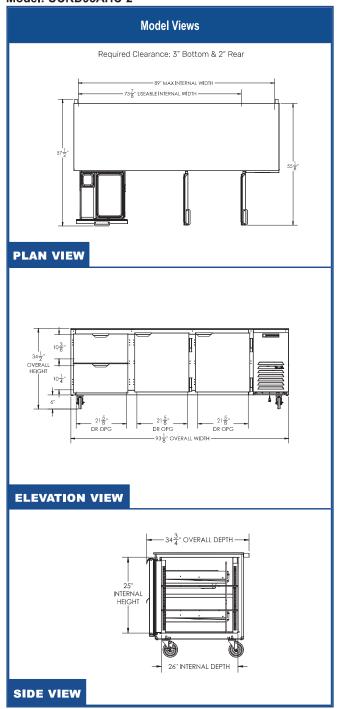

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug set.

