



## Waterloo Deck-Mounted Faucet with Single Inlet and 12" Swing Spout

#750FD112

Item #: 750FD112 Qty: \_\_\_\_\_

Project: \_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_



### Features

- 12" swing spout with 2 GPM aerator
- Single base, 1/2" NPT inlets on 20" flexible water hoses
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridge with check valve

### Certifications



CSA, US and Canada



NSF Listed




1/2" Water Connection

### Technical Data

Spout Length	12 Inches
Faucet Height	8 7/16 Inches
Cartridge Type	Ceramic
Faucet Centers	Single
Features	ASME A112.18.1 / CSA B125.1 NSF/ANSI 372 NSF/ANSI 61
Finish	Chrome
Flow Rate	2 GPM
Handle Type	Lever

Technical Data	
Material	Brass
Mounting Style	Deck Mounted
Mounting Type	Adjustable
Rough In	Single
Spout Clearance	6 1/8 Inches
Spout Type	Swing
Sprayer	Without Sprayer
Temperature Rating	40 - 180 Degrees F
Thread Size	55/64"-27 UNS
Type	Faucets
Water Inlet Size	1/2 Inches

## Plan View

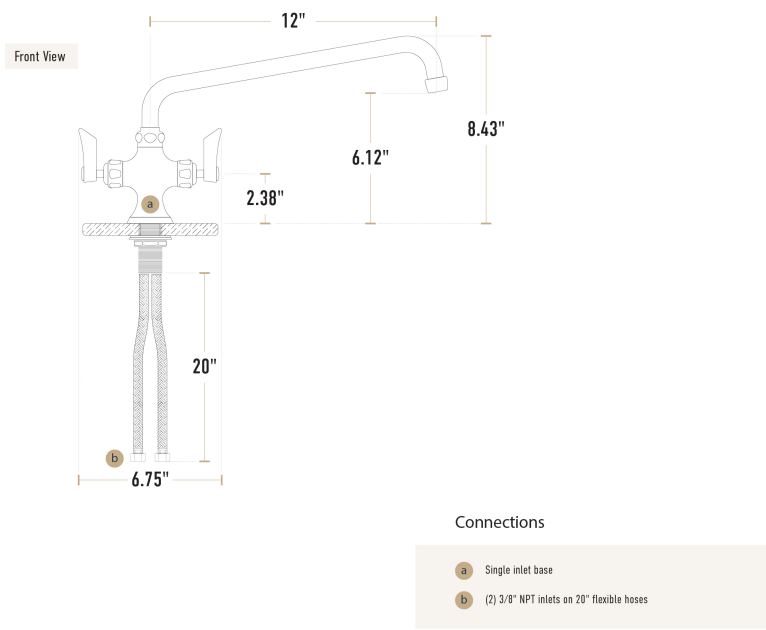

## Notes & Details

This Waterloo deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 12" long swing spout that moves easily around the sink bowl, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a single base, while the deck-mounted design is easy to install with a pair of 1/2" NPT inlets on 20" flexible water hoses.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm.  
For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).