


TAG

Z60842AV-BWN Exposed Flush Valve

with Bedpan Washer and Service Sink Faucet

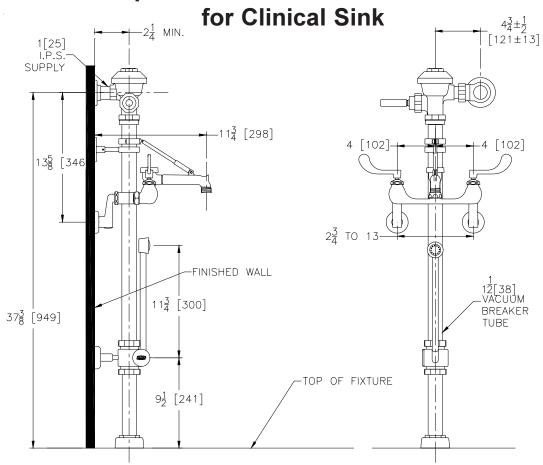

Flow Options

Standard Flush 6.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

-BG	BioCare Handle
-H	Handle on Front of Flush Valve
-L	1" [25] Metal Push Button
 -L3	3" [76] Metal Push Button
 -YJ	Split Ring Pipe Support
 -YK	Solid Ring Pipe Support
	Other

ENGINEERING SPECIFICATION: ZURN Z60842AV-BWN AquaVantage™ 'AV' Clinic Sink Flush Valve with Bedpan Washer and Service Sink Faucet - Quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with Zurn's AquaVantage TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. Valve is complete with a non-hold open and no leak handle feature, high back pressure vacuum breaker, bedpan washer assembly, wall bracket and support rod, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. The ZURN Z842M4-LS1-2XT Clinical Sink Faucet features a polished chrome plated cast brass body, quater-turn ceramic disc cartridges, 2-1/2" long swivel inlets (with integral stops) providing adjustable centers from 2-3/4" to 13", a 6" centerline cast brass vacuum breaker spout with top brace, and 4" vandal resistant brass wrist blade color-coded handles.

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292